

TUES AL

EXPLODED DRAWING

HEADSET DIMENSIONS

TOP: ZS 49

BOTTOM: ZS 56

SHOCK INSTALLATION LENGHT

267 X 89 MM

SHOCK HARDWARE

FRONT: Ø 8 X 20 MM

REAR: Ø 8 X 30 MM

SEATPOST DIAMETER

30,9 MM

SEATPOSTCLAMP INNER DIAMETER


35,0 MM

BREAKMOUNT STANDARD

POSTMOUNT 180

BOTTOM BRACKET STANDARD


PRESSFIT BOTTOM BRACKET 30 X 83 MM

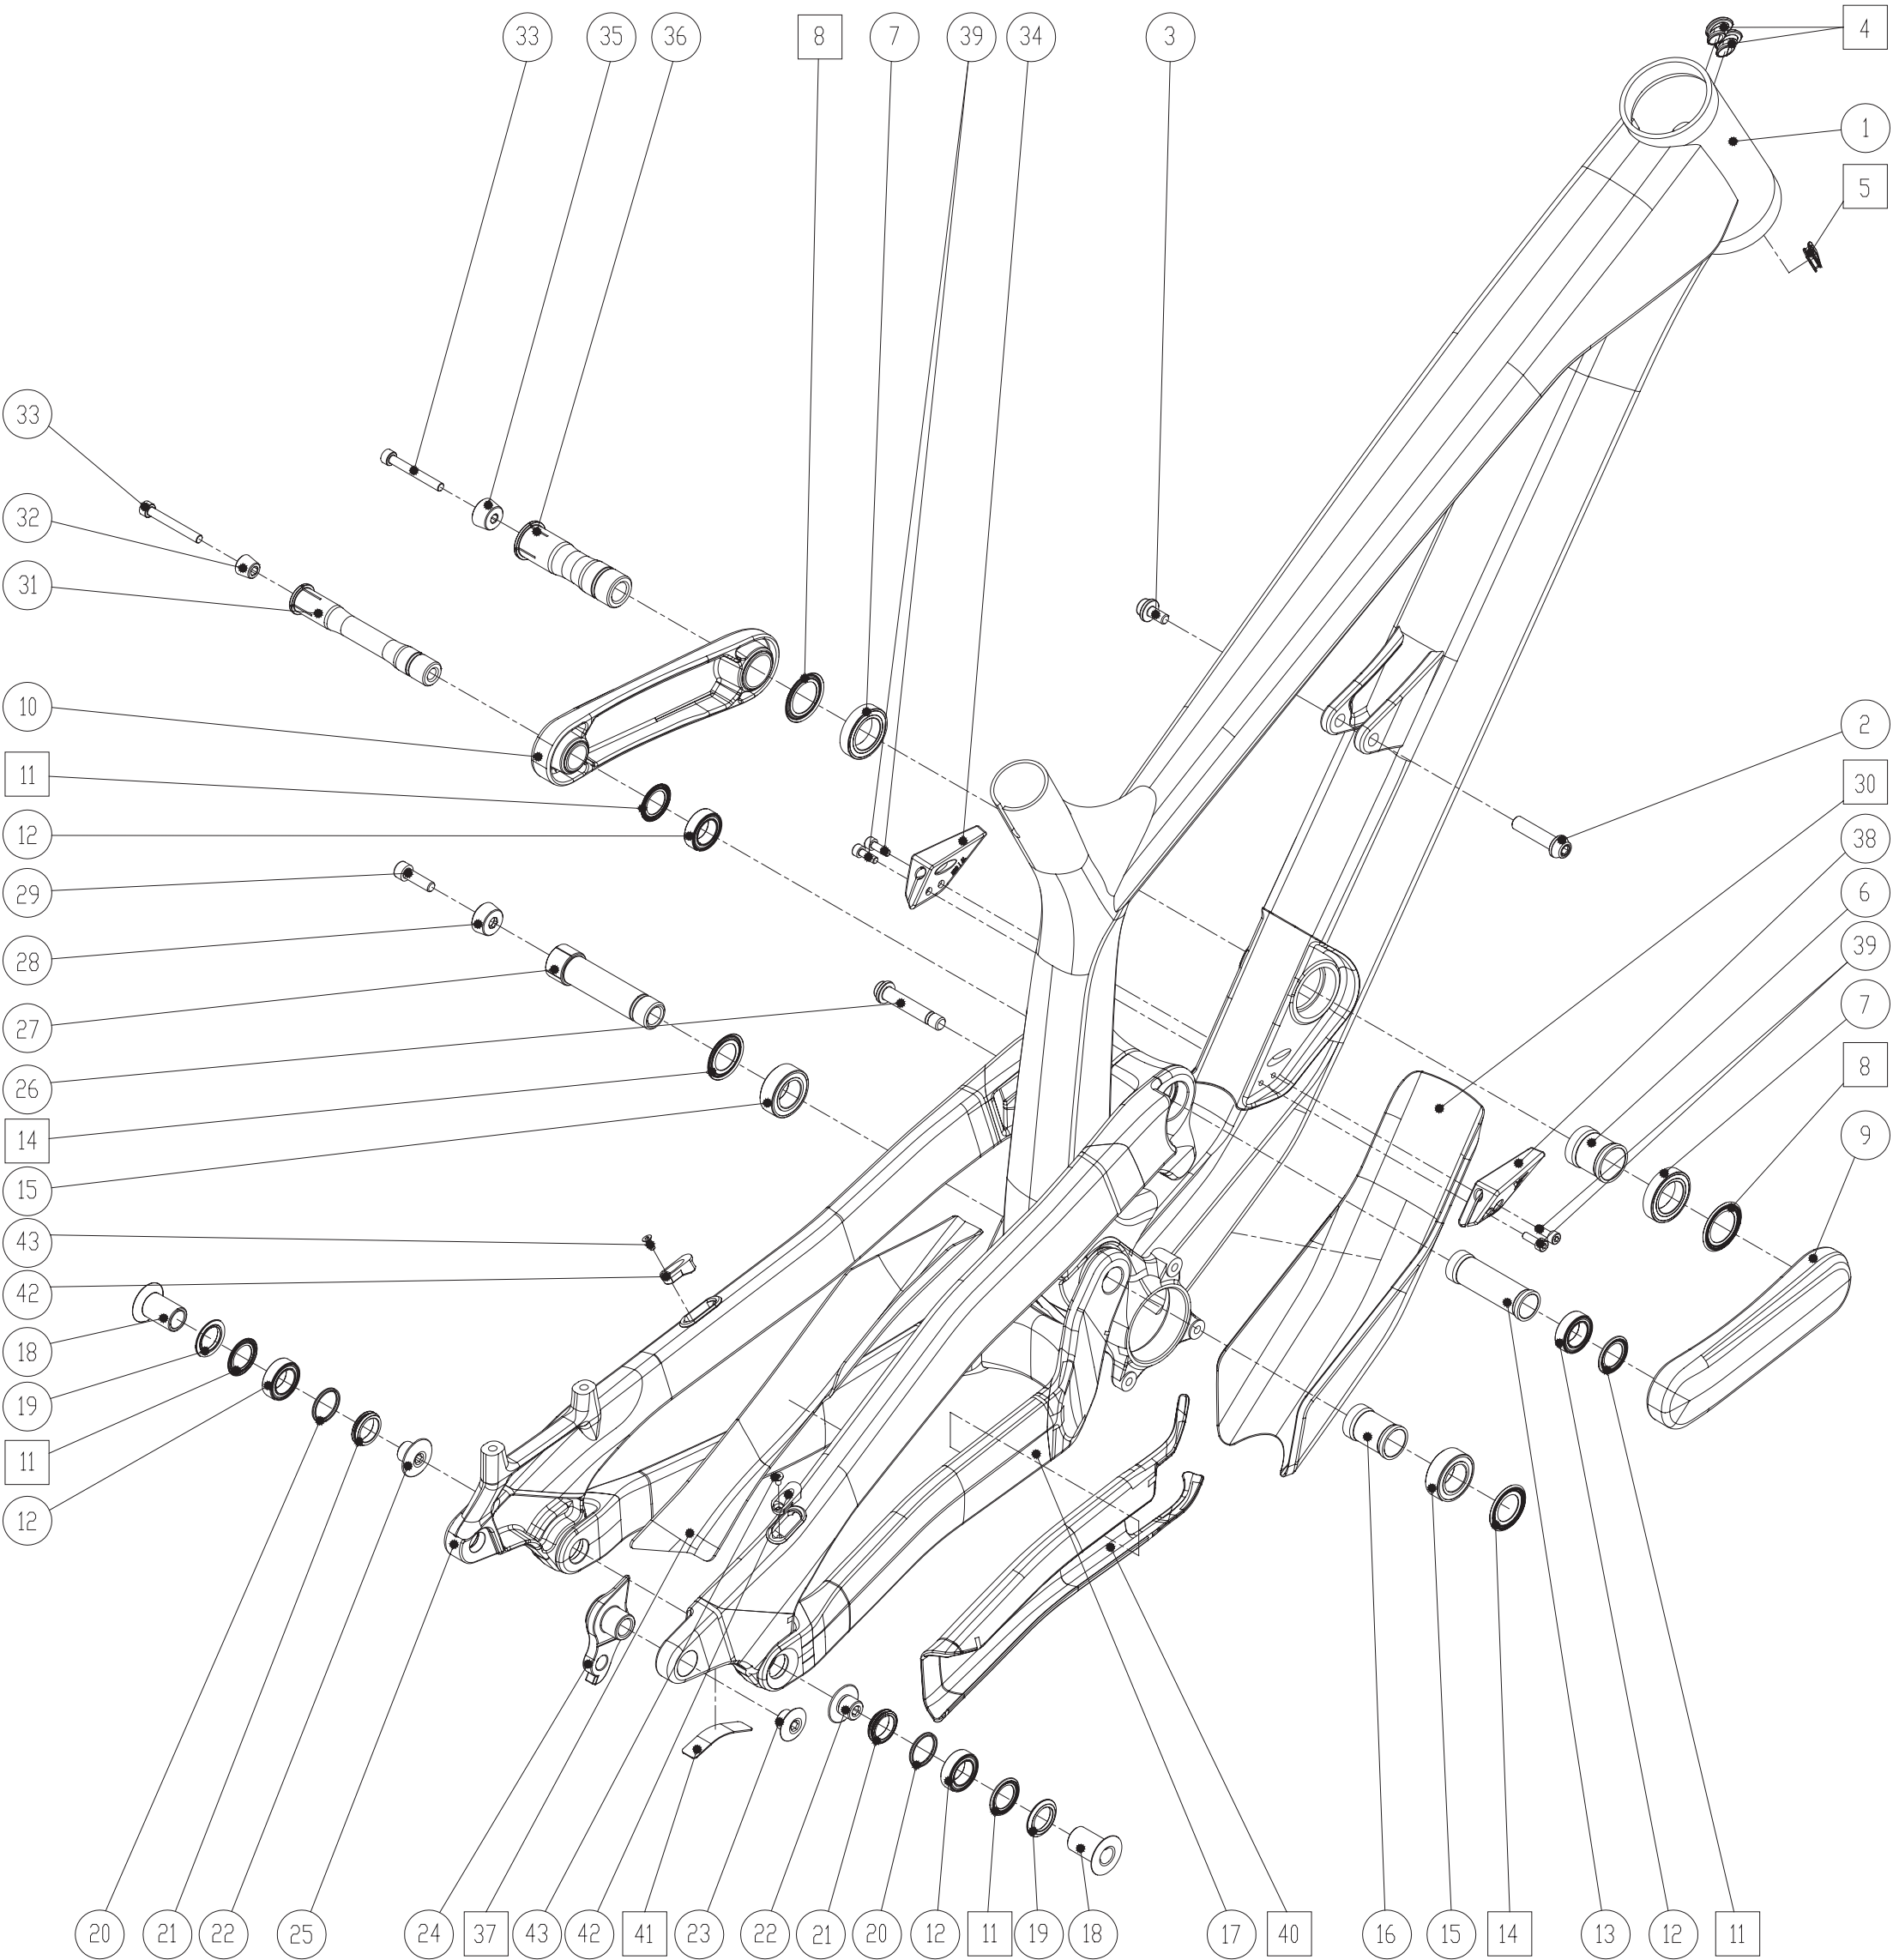


POS.	Part description	Quantity
1	FRONT TRIANGLE	1
2	SHOCK BOLT FRONT	1
3	SHOCK BOLT SCREW	1
4	HT CABLE INTAKE 5.3MM	2
5	HT INNER CABLEGUIDE	1
6	DISTANCE SLEEVE	1
7	61804-2RS BEARING	2
8	ACROS WASHER 20x32	2
9	LINK-R	1
10	LINK-L	1
11	ACROS WASHER 15x24	4
12	63802-2RS BEARING	4
13	DISTANCE SLEEVE	1
14	ACROS WASHER 17x30	2
15	3903-2RS BEARING	2
16	DISTANCE SLEEVE	1
17	CHAINSTAY	1
18	HORSTLINK BOLT	2
19	DISTANCE WASHER	2
20	X RING	2
21	DISTANCE WASHER	2
22	HORSTLINK SCREW	2
23	MECH HANGER SCREW	1
24	MECH HANGER	1
25	SEATSTAY	1
26	SHOCK BOLT REAR	1
27	MAIN PIVOT AXLE	1
28	TAPER WASHER	1
29	SCREW M6x20	1
30	DT PROTECTION	1
31	UPPER LINK AXLE	1
32	TAPER WASHER	1
33	SCREW M5x35	2
34	CABLE CLAMP-L	1
35	TAPER WASHER	1
36	LOWER LINK AXLE	1
37	SEATSTAY PROTECTOR	1
38	CABLE CLAMP-R	1
39	SCREW M4x12	4
40	CHAINSTAY PROTECTOR	1
41	RD PROTECTION	1
42	CABLE OUTTAKE	2
43	SCREW M3x8	2

TUES AL

TORQUE // THREADLOCKER & GREASE INFORMATION

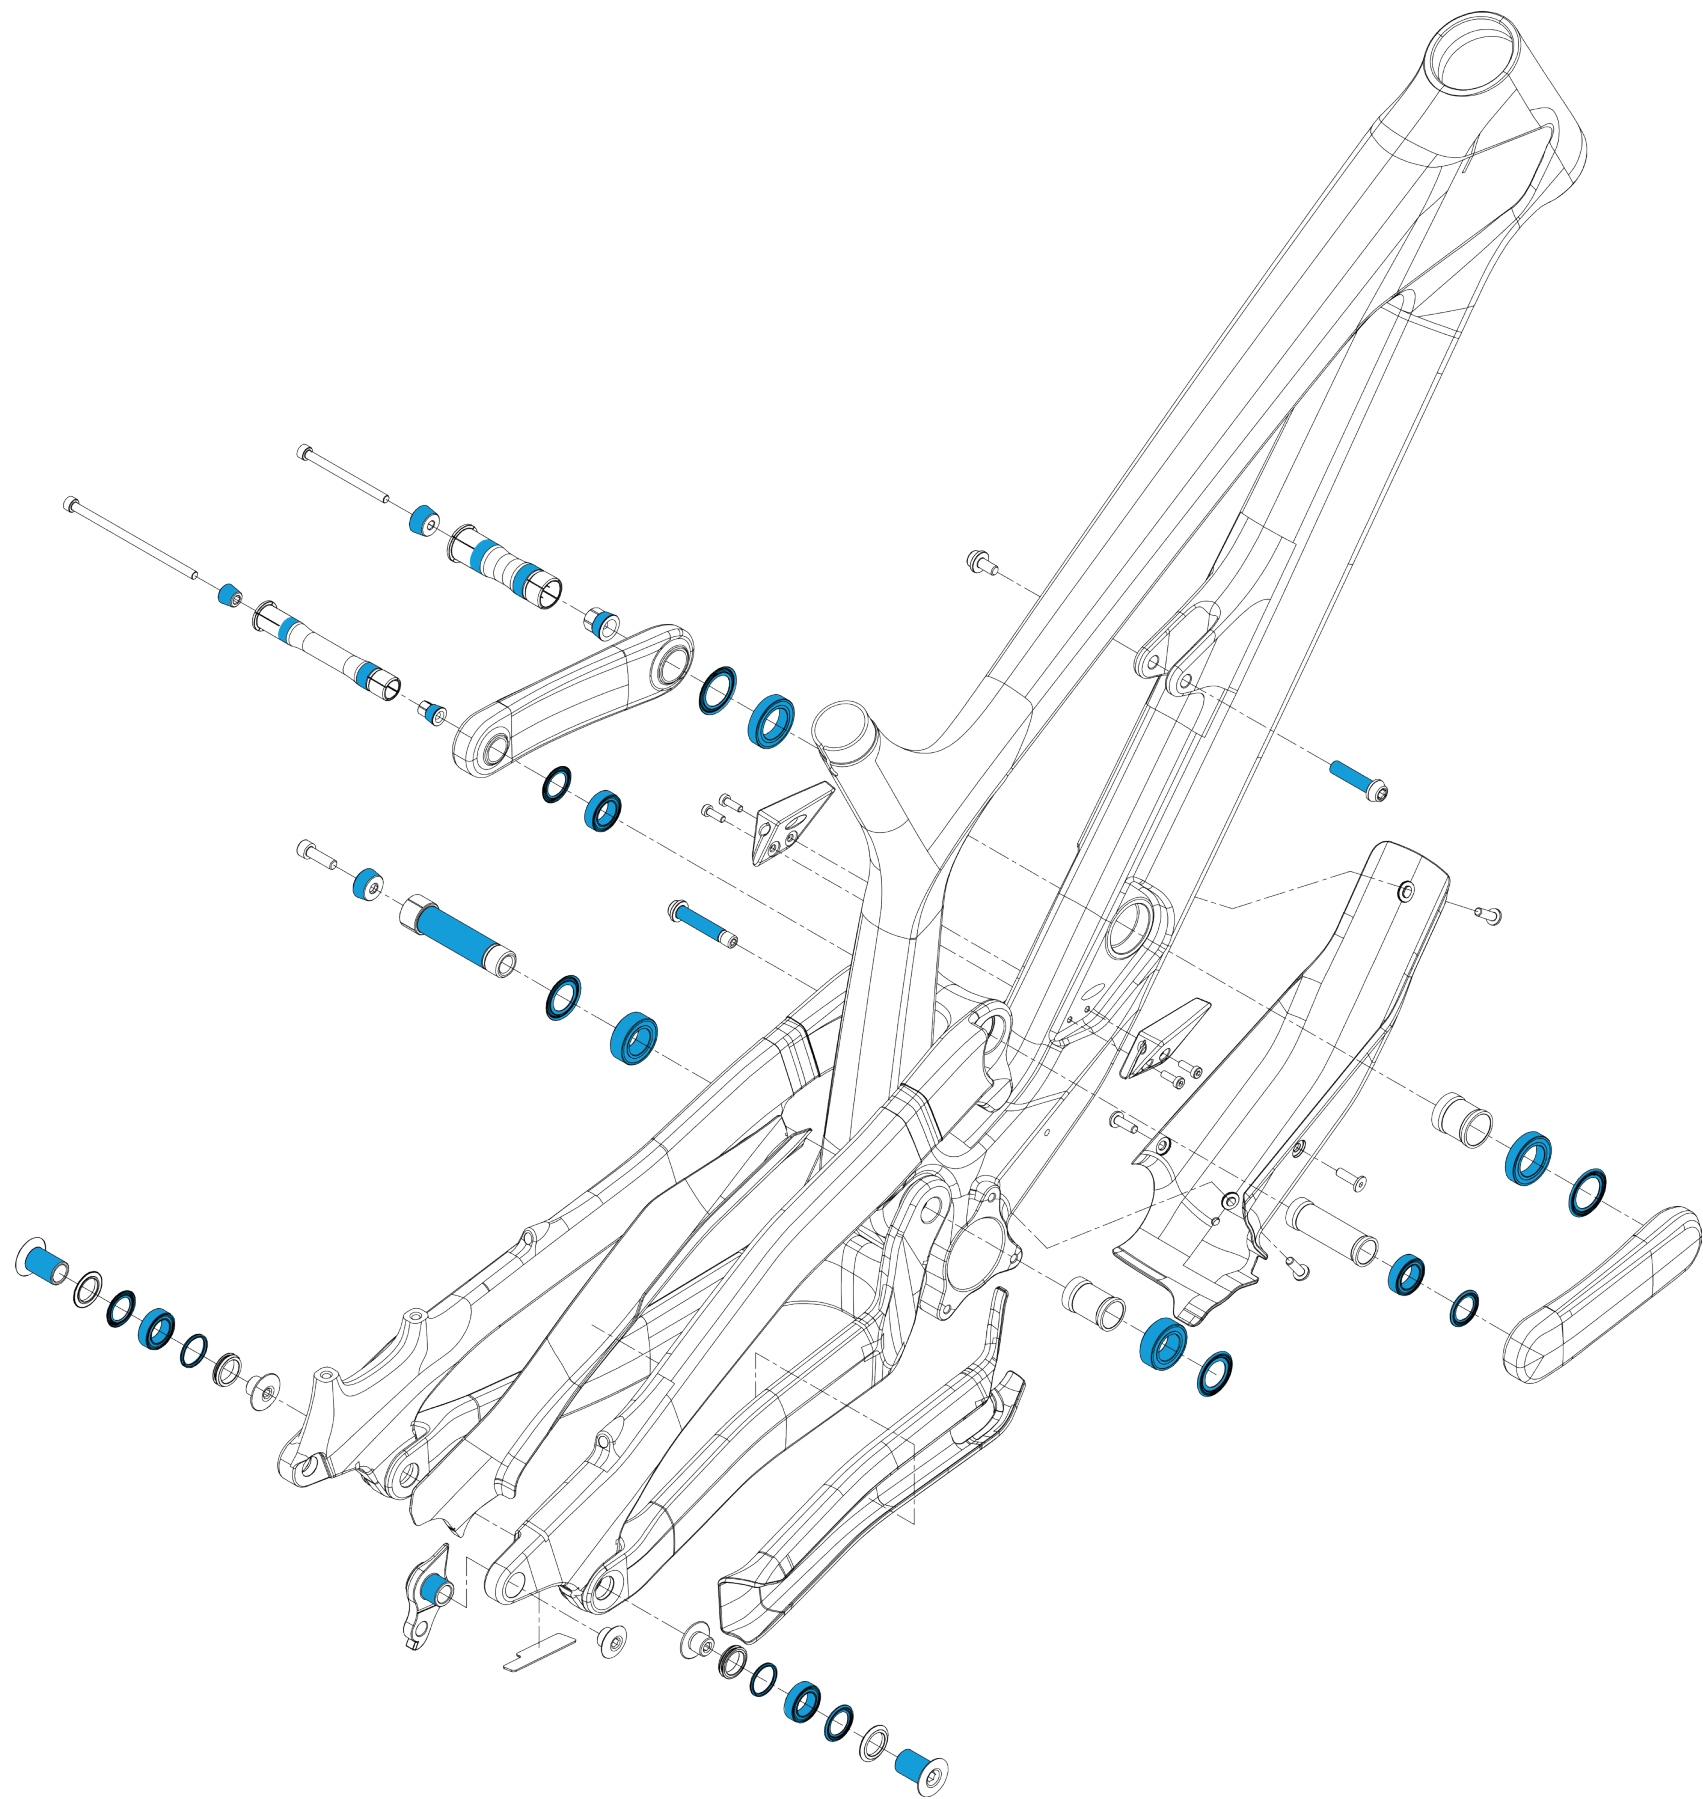

GREASE

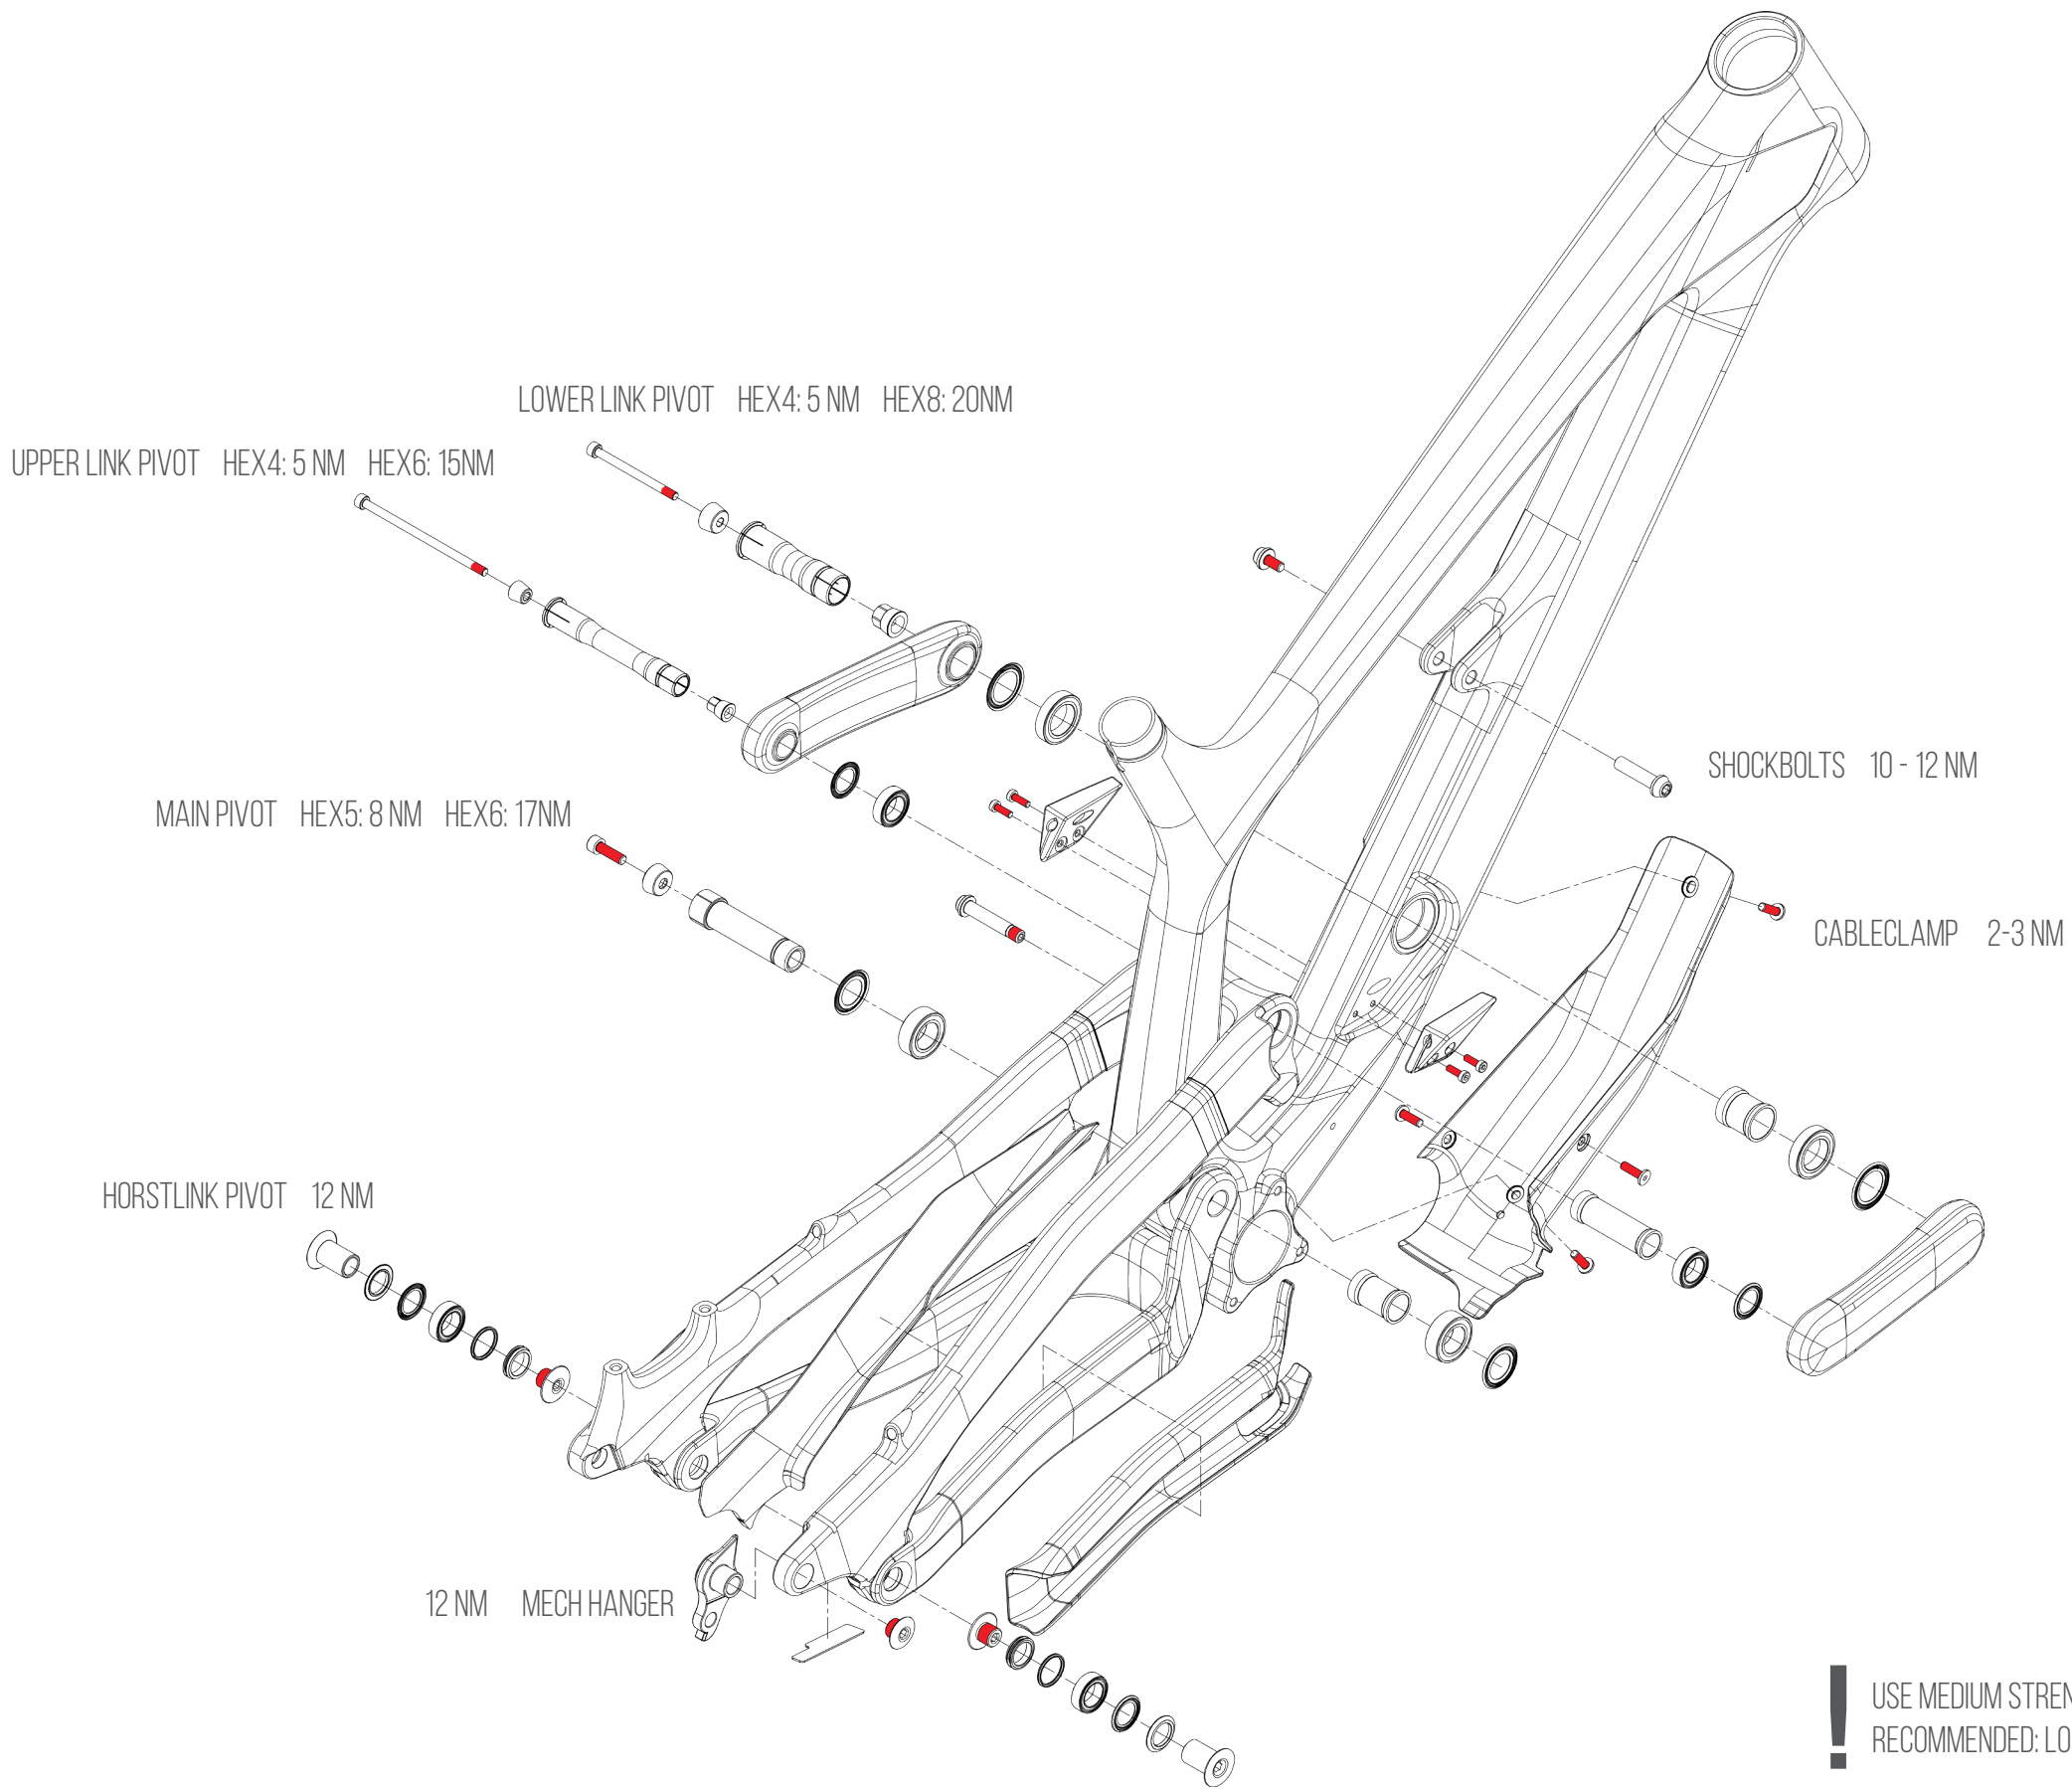

THREADLOCKER

! USE MEDIUM STRENGTH THREADLOCKER
RECOMMENDED: LOCTITE 243