

PRIMUS 24 + 26 AL



HEADSET DIMENSIONS

TOP: ZS 44 | (1 1/8")
BOTTOM: ZS 56 | (1.5")

SHOCK INSTALLATION LENGTH

24": 190 X 40 MM
26" 190 X 45 MM

SHOCK HARDWARE

FRONT: Ø8X30MM
REAR: Ø8X30MM

SEATPOST DIAMETER

31,6MM

SEATPOST CLAMP INNER DIAMETER

34,9MM

BRAKE MOUNT STANDARD


POSTMOUNT 160

ISCG STANDARD

ISCG 05


BOTTOM BRACKET STANDARD

92MM GXP PRESSFIT BOTTOM BRACKET

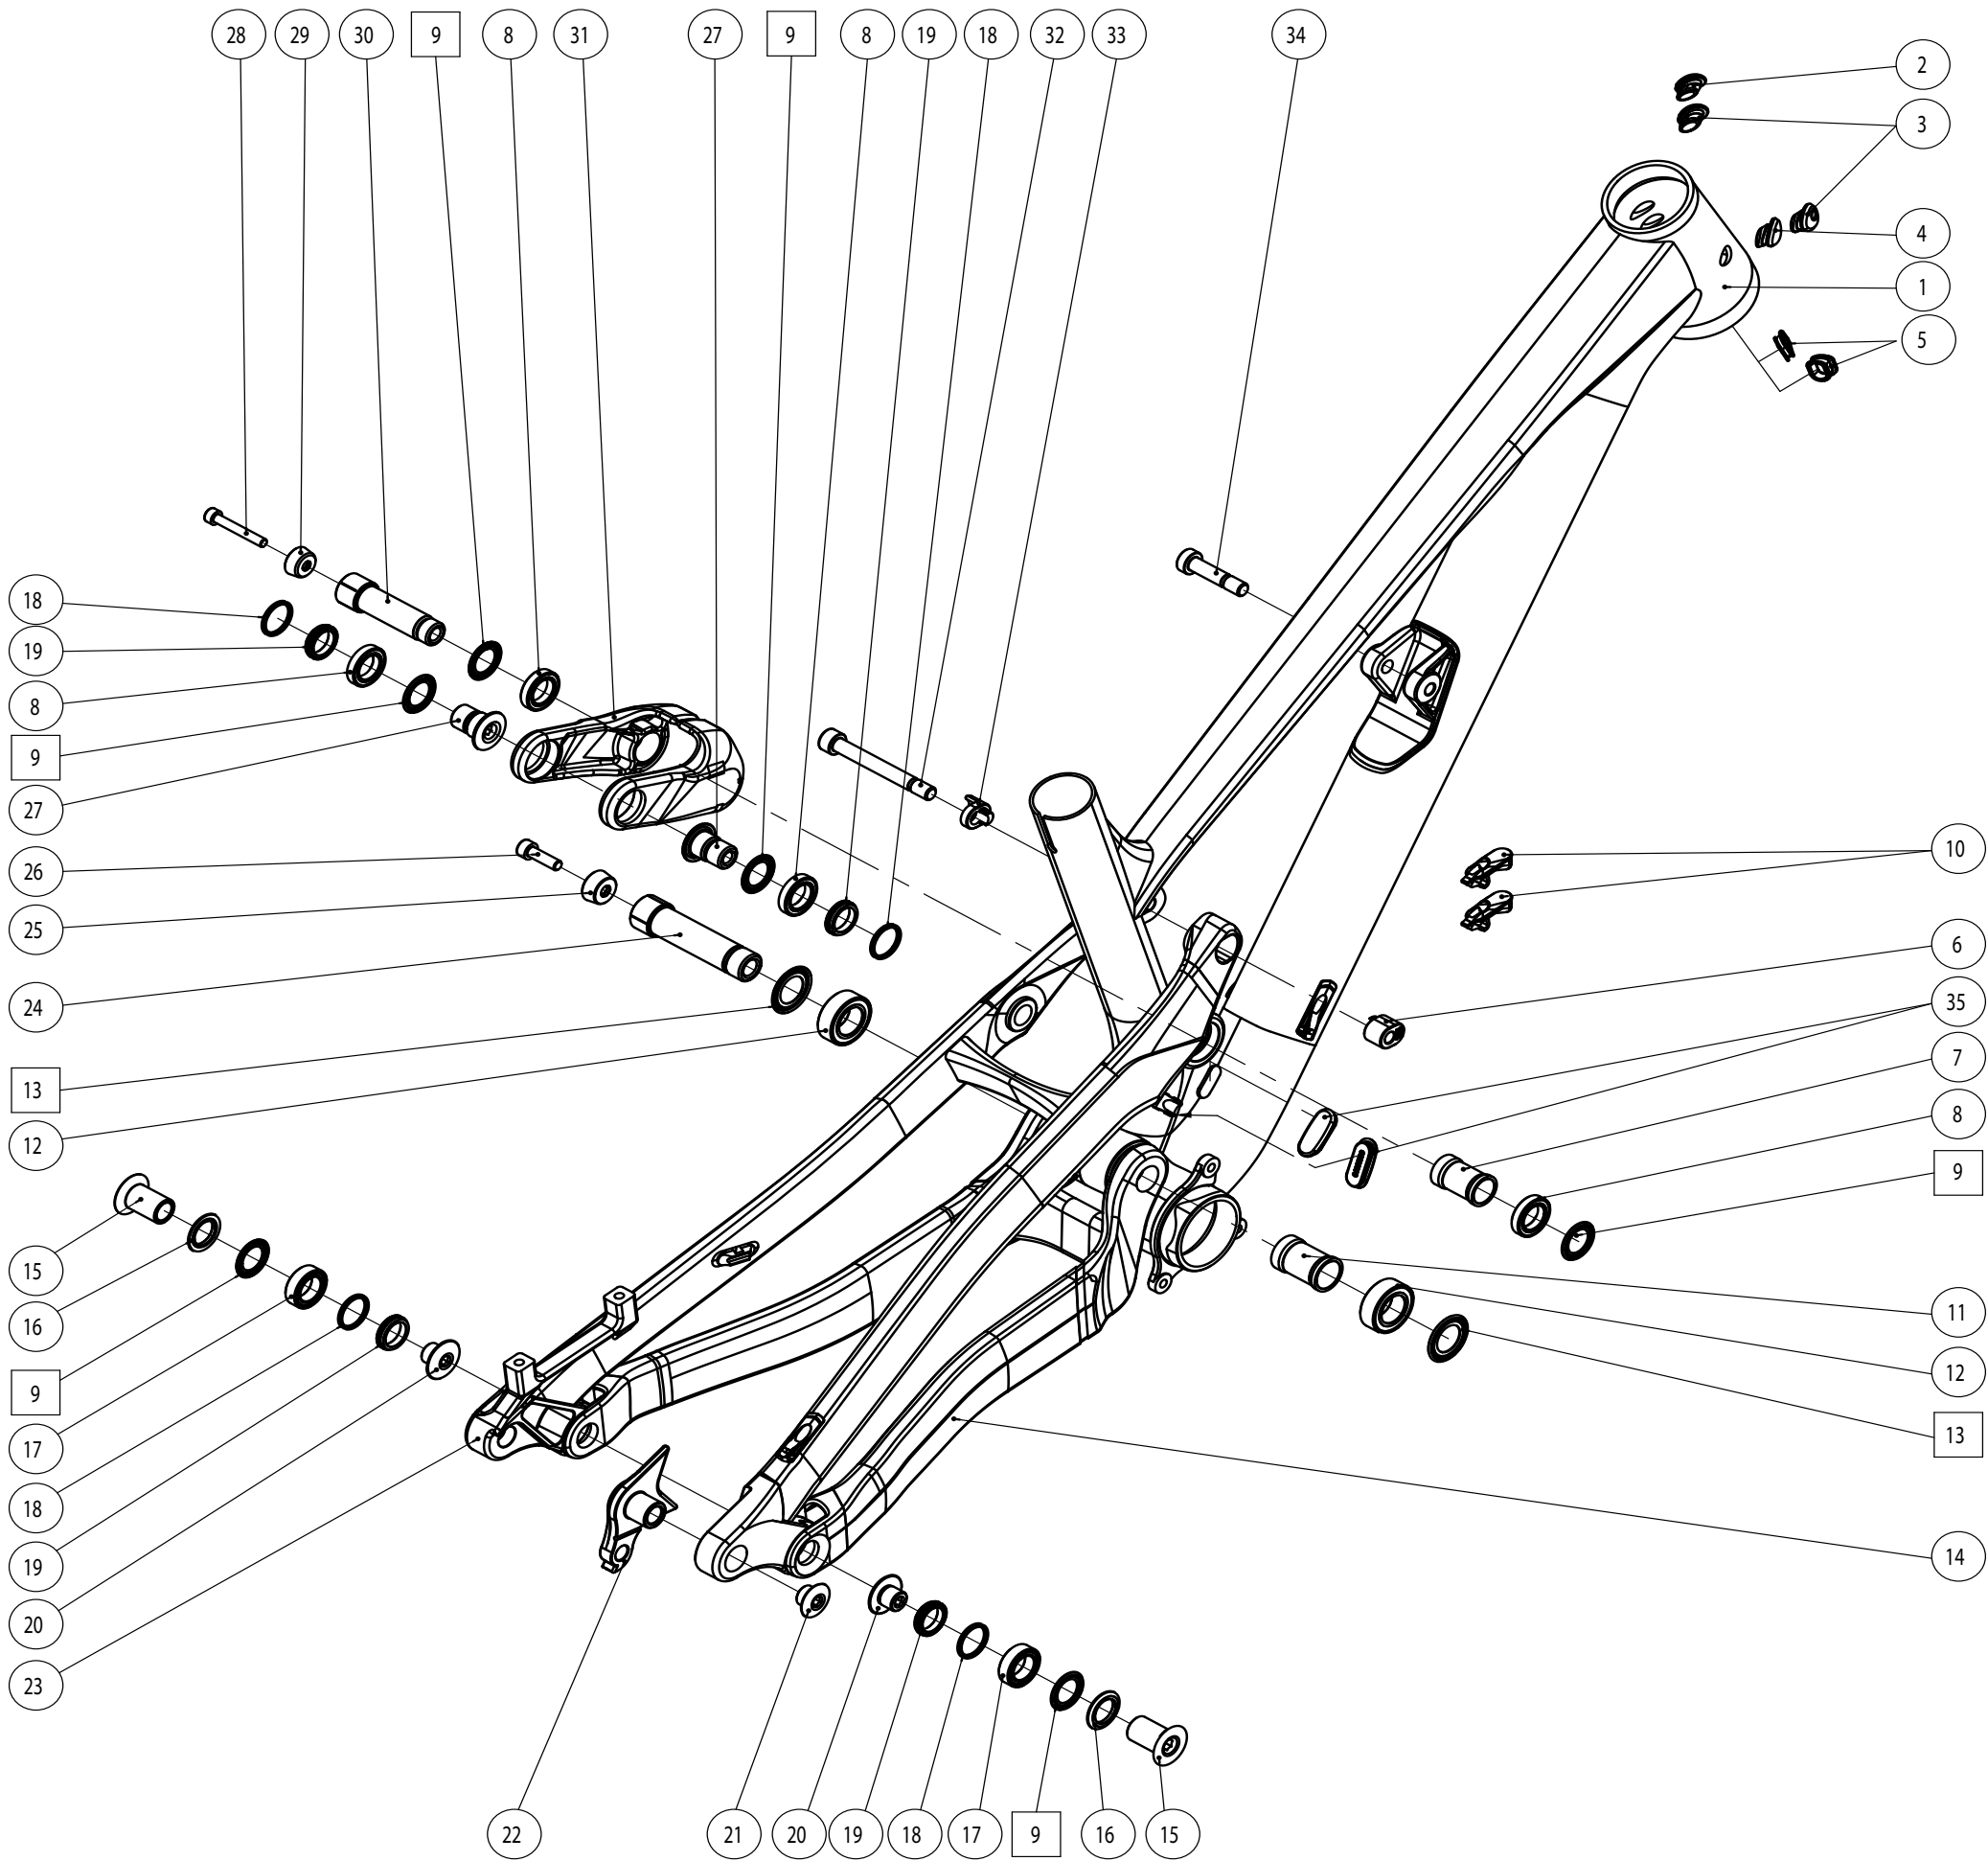

POS.	Part description	Quantity
1	FRONT TRIANGLE	1
2	HT CABLE INTAKE 5.3mm	1
3	HT CABLE INTAKE 4mm	2
4	HT CABLE INTAKE	1
5	HT INNER RUBBER CABLEGUIDE	2
6	FLIP CHIP DS	1
7	SLEEVE 15x30	1
8	BEARING 61802-2RS	4
9	WASHER 15x24	6
10	CABLE INTAKE	2
11	SLEEVE 17x32	1
12	BEARING 3903-2RS	2
13	WASHER 17x30	2
14	CHAINSTAY	1
15	HORSTLINK BOLT	2
16	DISTANCE WASHER 15x21x2,5	1
17	BEARING 63802-2RS	2
18	X-RING	4
19	DISTANCE WASHER 15x21x4,5	4
20	HORSTLINK SCREW	2
21	SCREW M12x1,5	1
22	MECH HANGER	1
23	SEATSTAY	1
24	MAIN PIVOT AXLE	1
25	TAPER WASHER	1
26	SCREW M6x20	1
27	UPPER LINK BOLT	2
28	SCREW M5 x 35	1
29	TAPER WASHER	1
30	LOWER LINK AXLE	1
31	LINK	1
32	REAR SHOCK BOLT	1
33	FLIPCHIP NDS	1
34	FRONT SHOCK BOLT	1


PRIMUS 24 + 26 AL

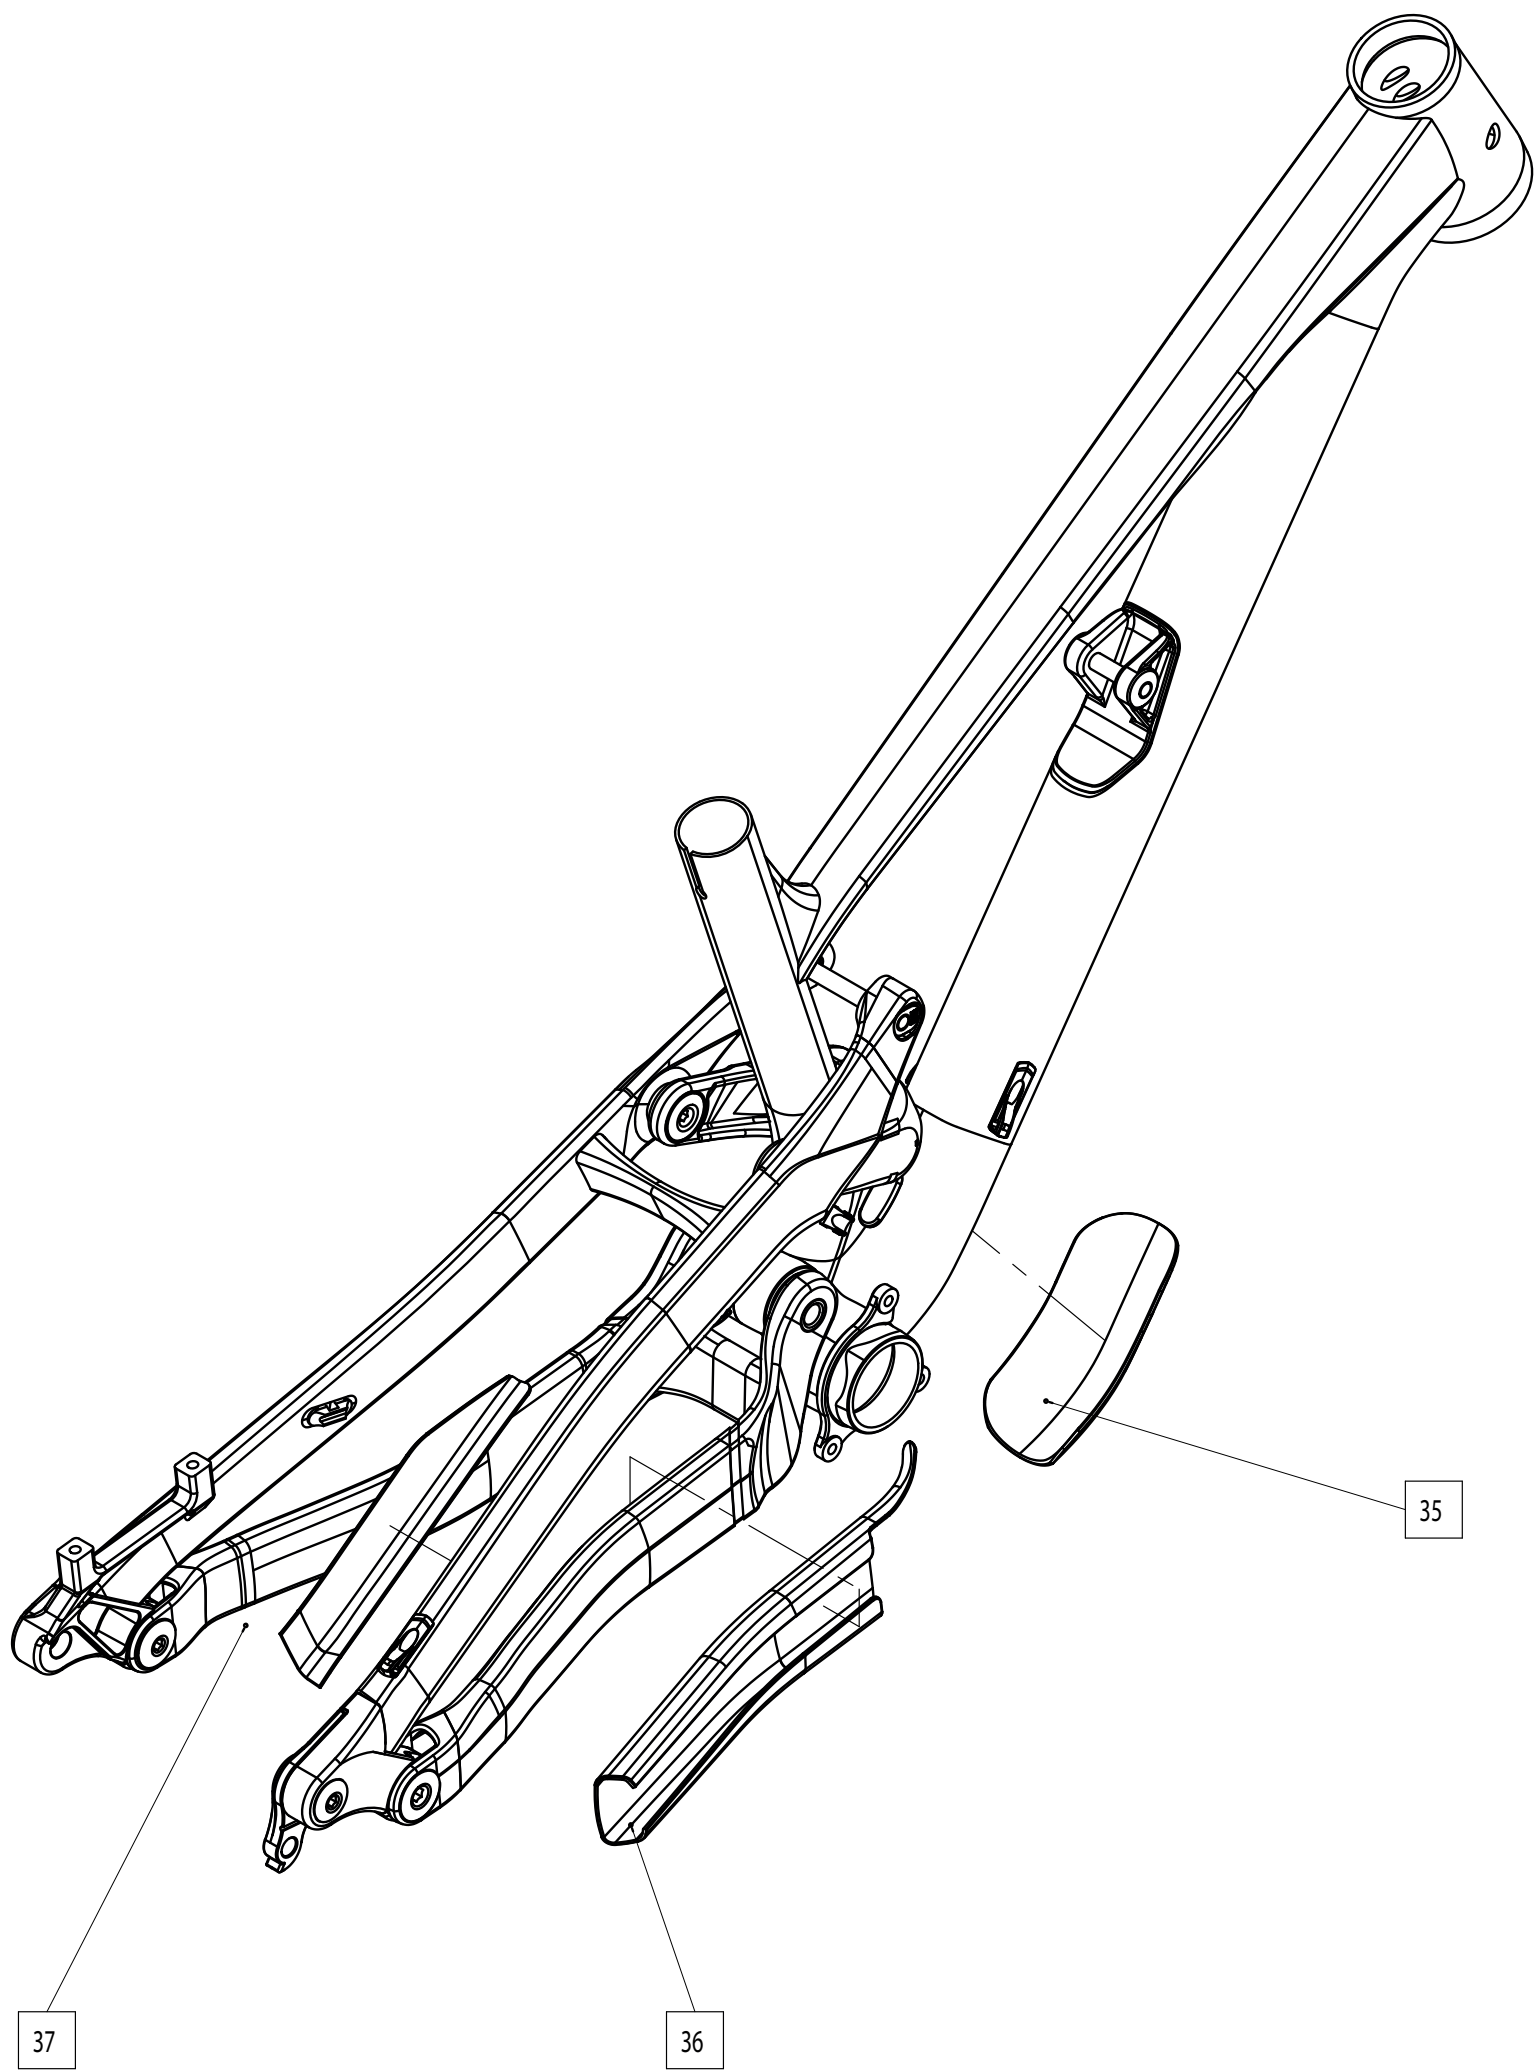

POS.	Part description	Quantity
35	DT PROTECTOR	1
36	CS PROTECTOR	1
37	SS PROTECTOR	1

PRIMUS 24 + 26 AL

TORQUE // THREADLOCKER & GREASE INFORMATION

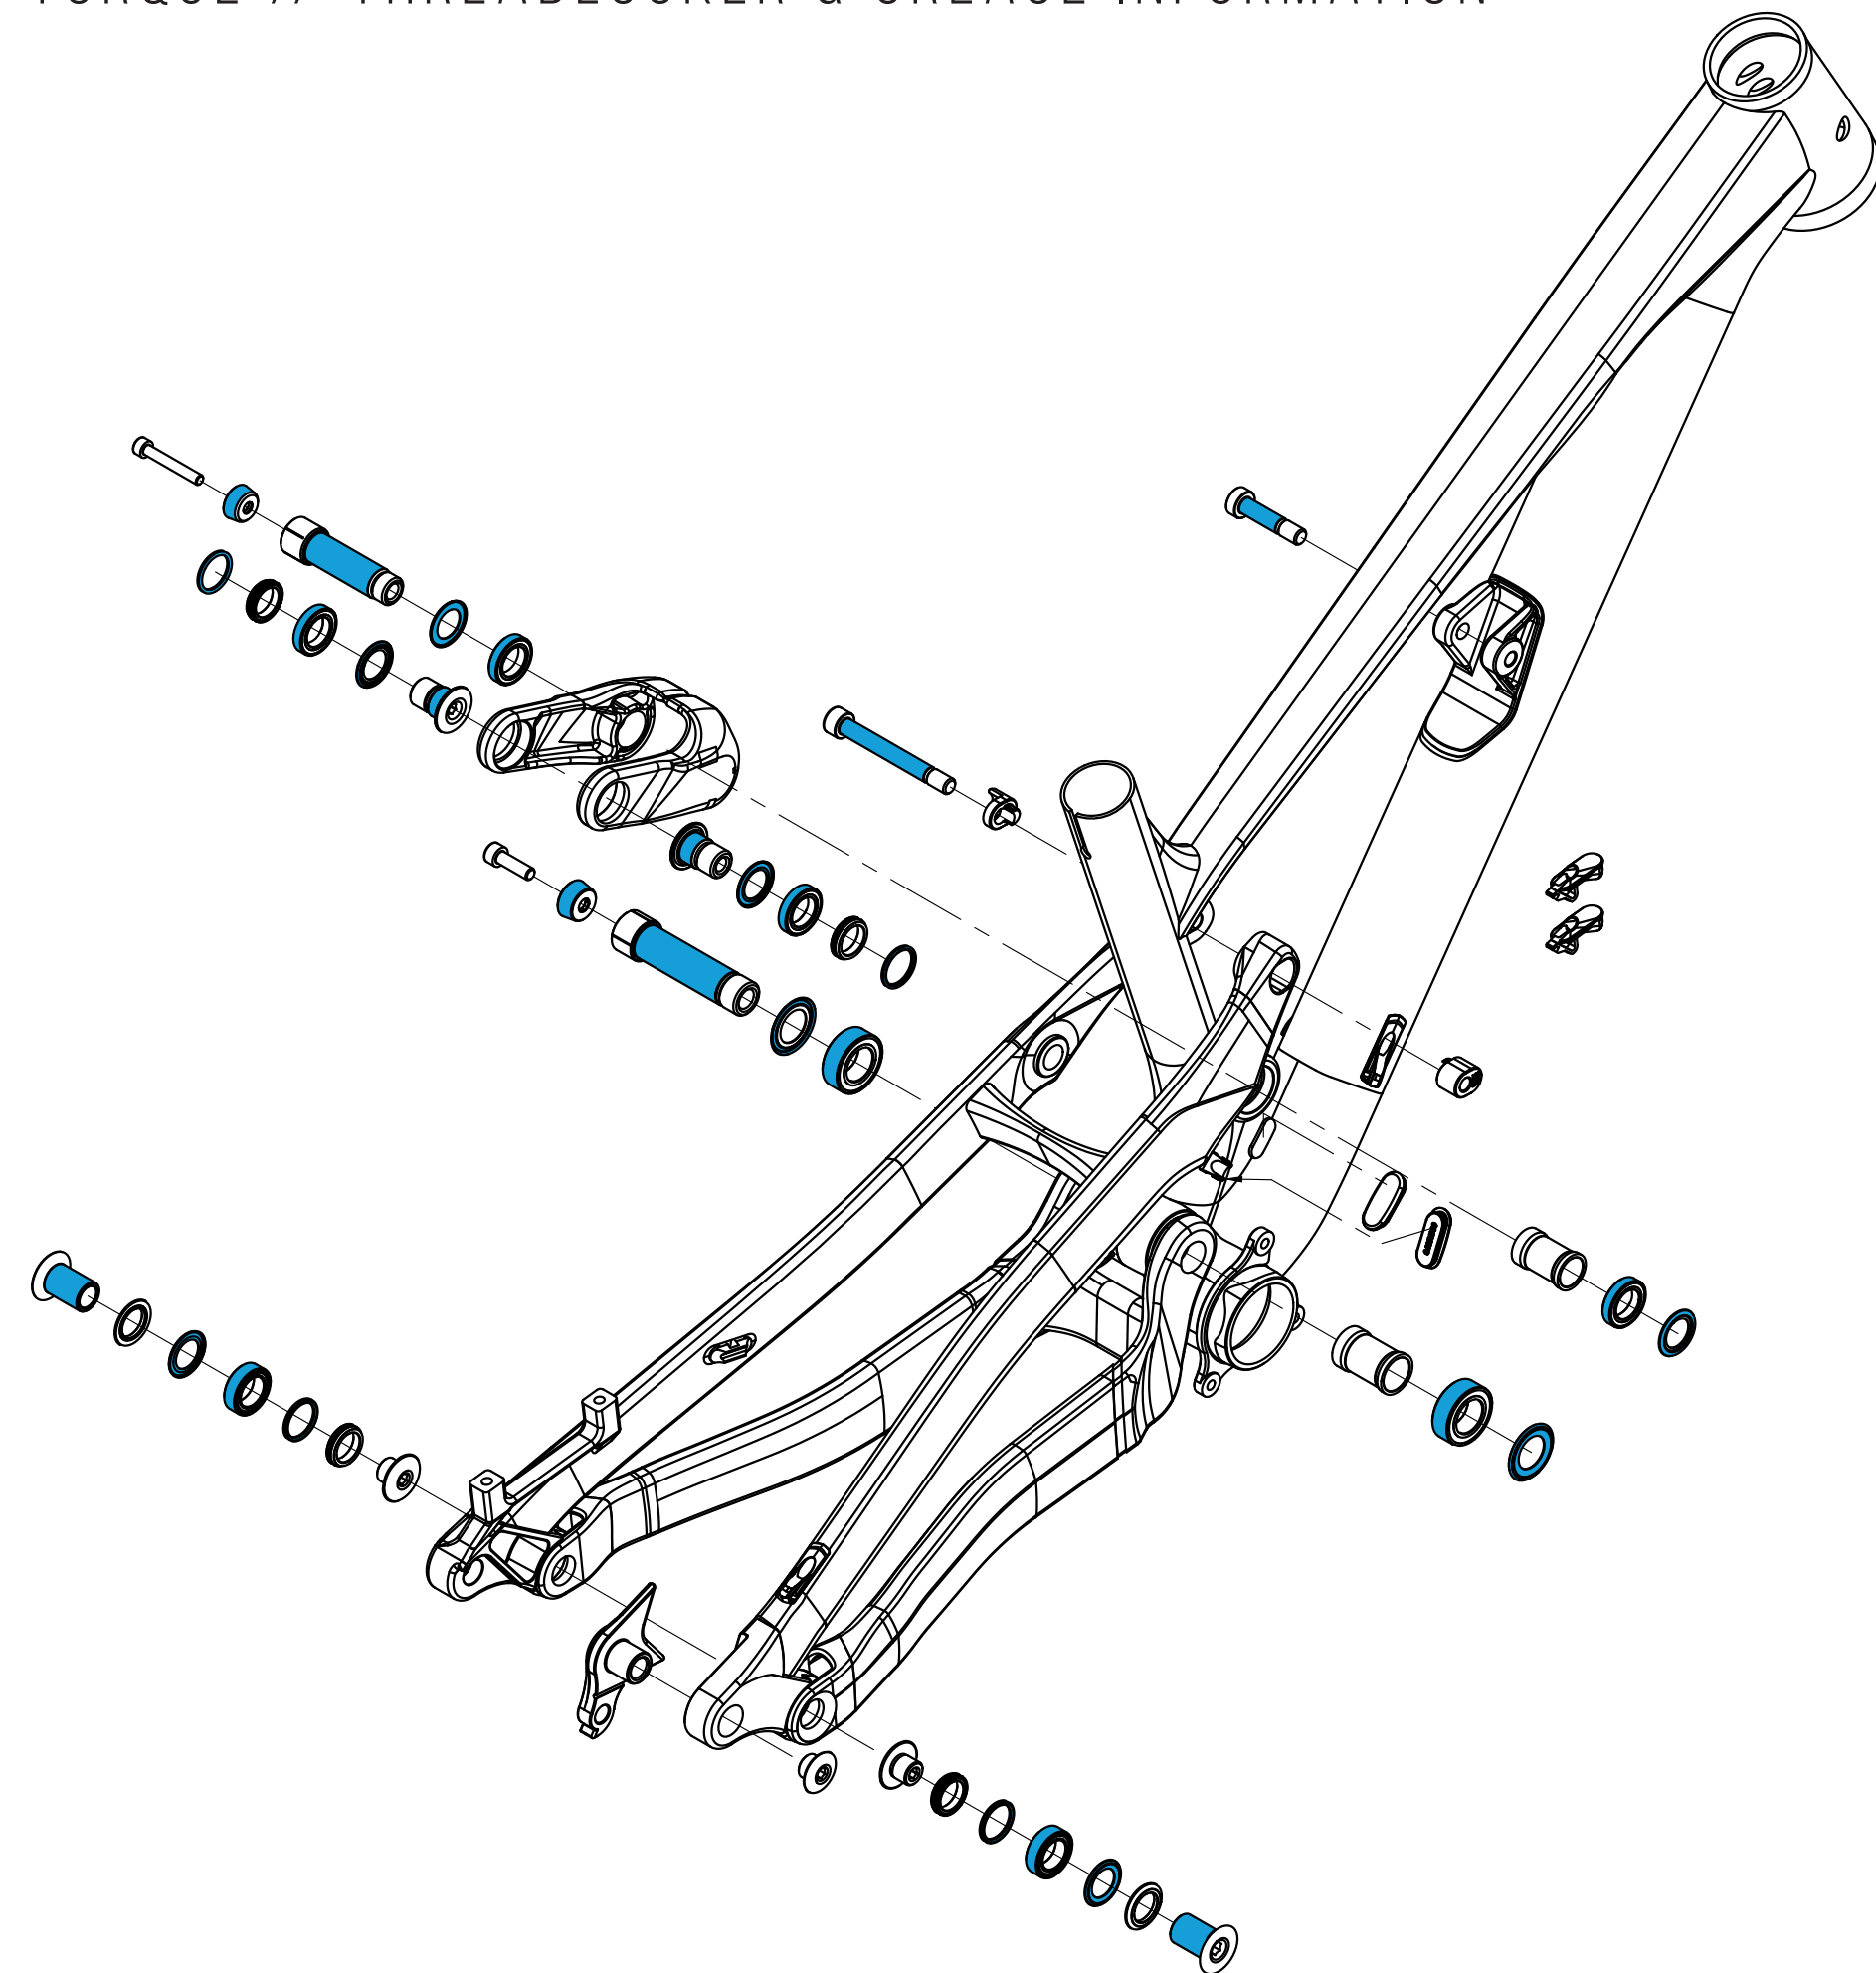

GREASE

LOWER LINK PIVOT HEX4: 5 NM HEX8: 20NM

UPPER LINK PIVOT 10 NM

MAIN PIVOT HEX5: 8 NM HEX6: 17NM

SHOCKBOLT FRONT 10 - 12 NM

SHOCKBOLT REAR 10 - 12 NM

12 NM MECH HANGER

HORSTLINK PIVOT 12 NM

THREADLOCKER

USE MEDIUM STRENGTH THREADLOCKER
RECOMMENDED: LOCTITE 243