

CAPRA 29 AL

EXPLODED DRAWING

HEADSET DIMENSIONS

TOP: ZS 44|28,6 (1 1/8")

BOTTOM: ZS 56 | 40 (1.5")

SHOCK INSTALLATION LENGHT

230 X 60/65 MM

SHOCK HARDWARE

FRONT: Ø8X30MM

REAR: Ø8X40MM

SEATPOST DIAMETER

31,6MM

SEATPOSTCLAMP INNER DIAMETER


34,9MM

BREAKMOUNT STANDARD

POSTMOUNT 180

BOTTOM BRACKET STANDARD


92MM GXP PRESSFIT BOTTOM BRACKET

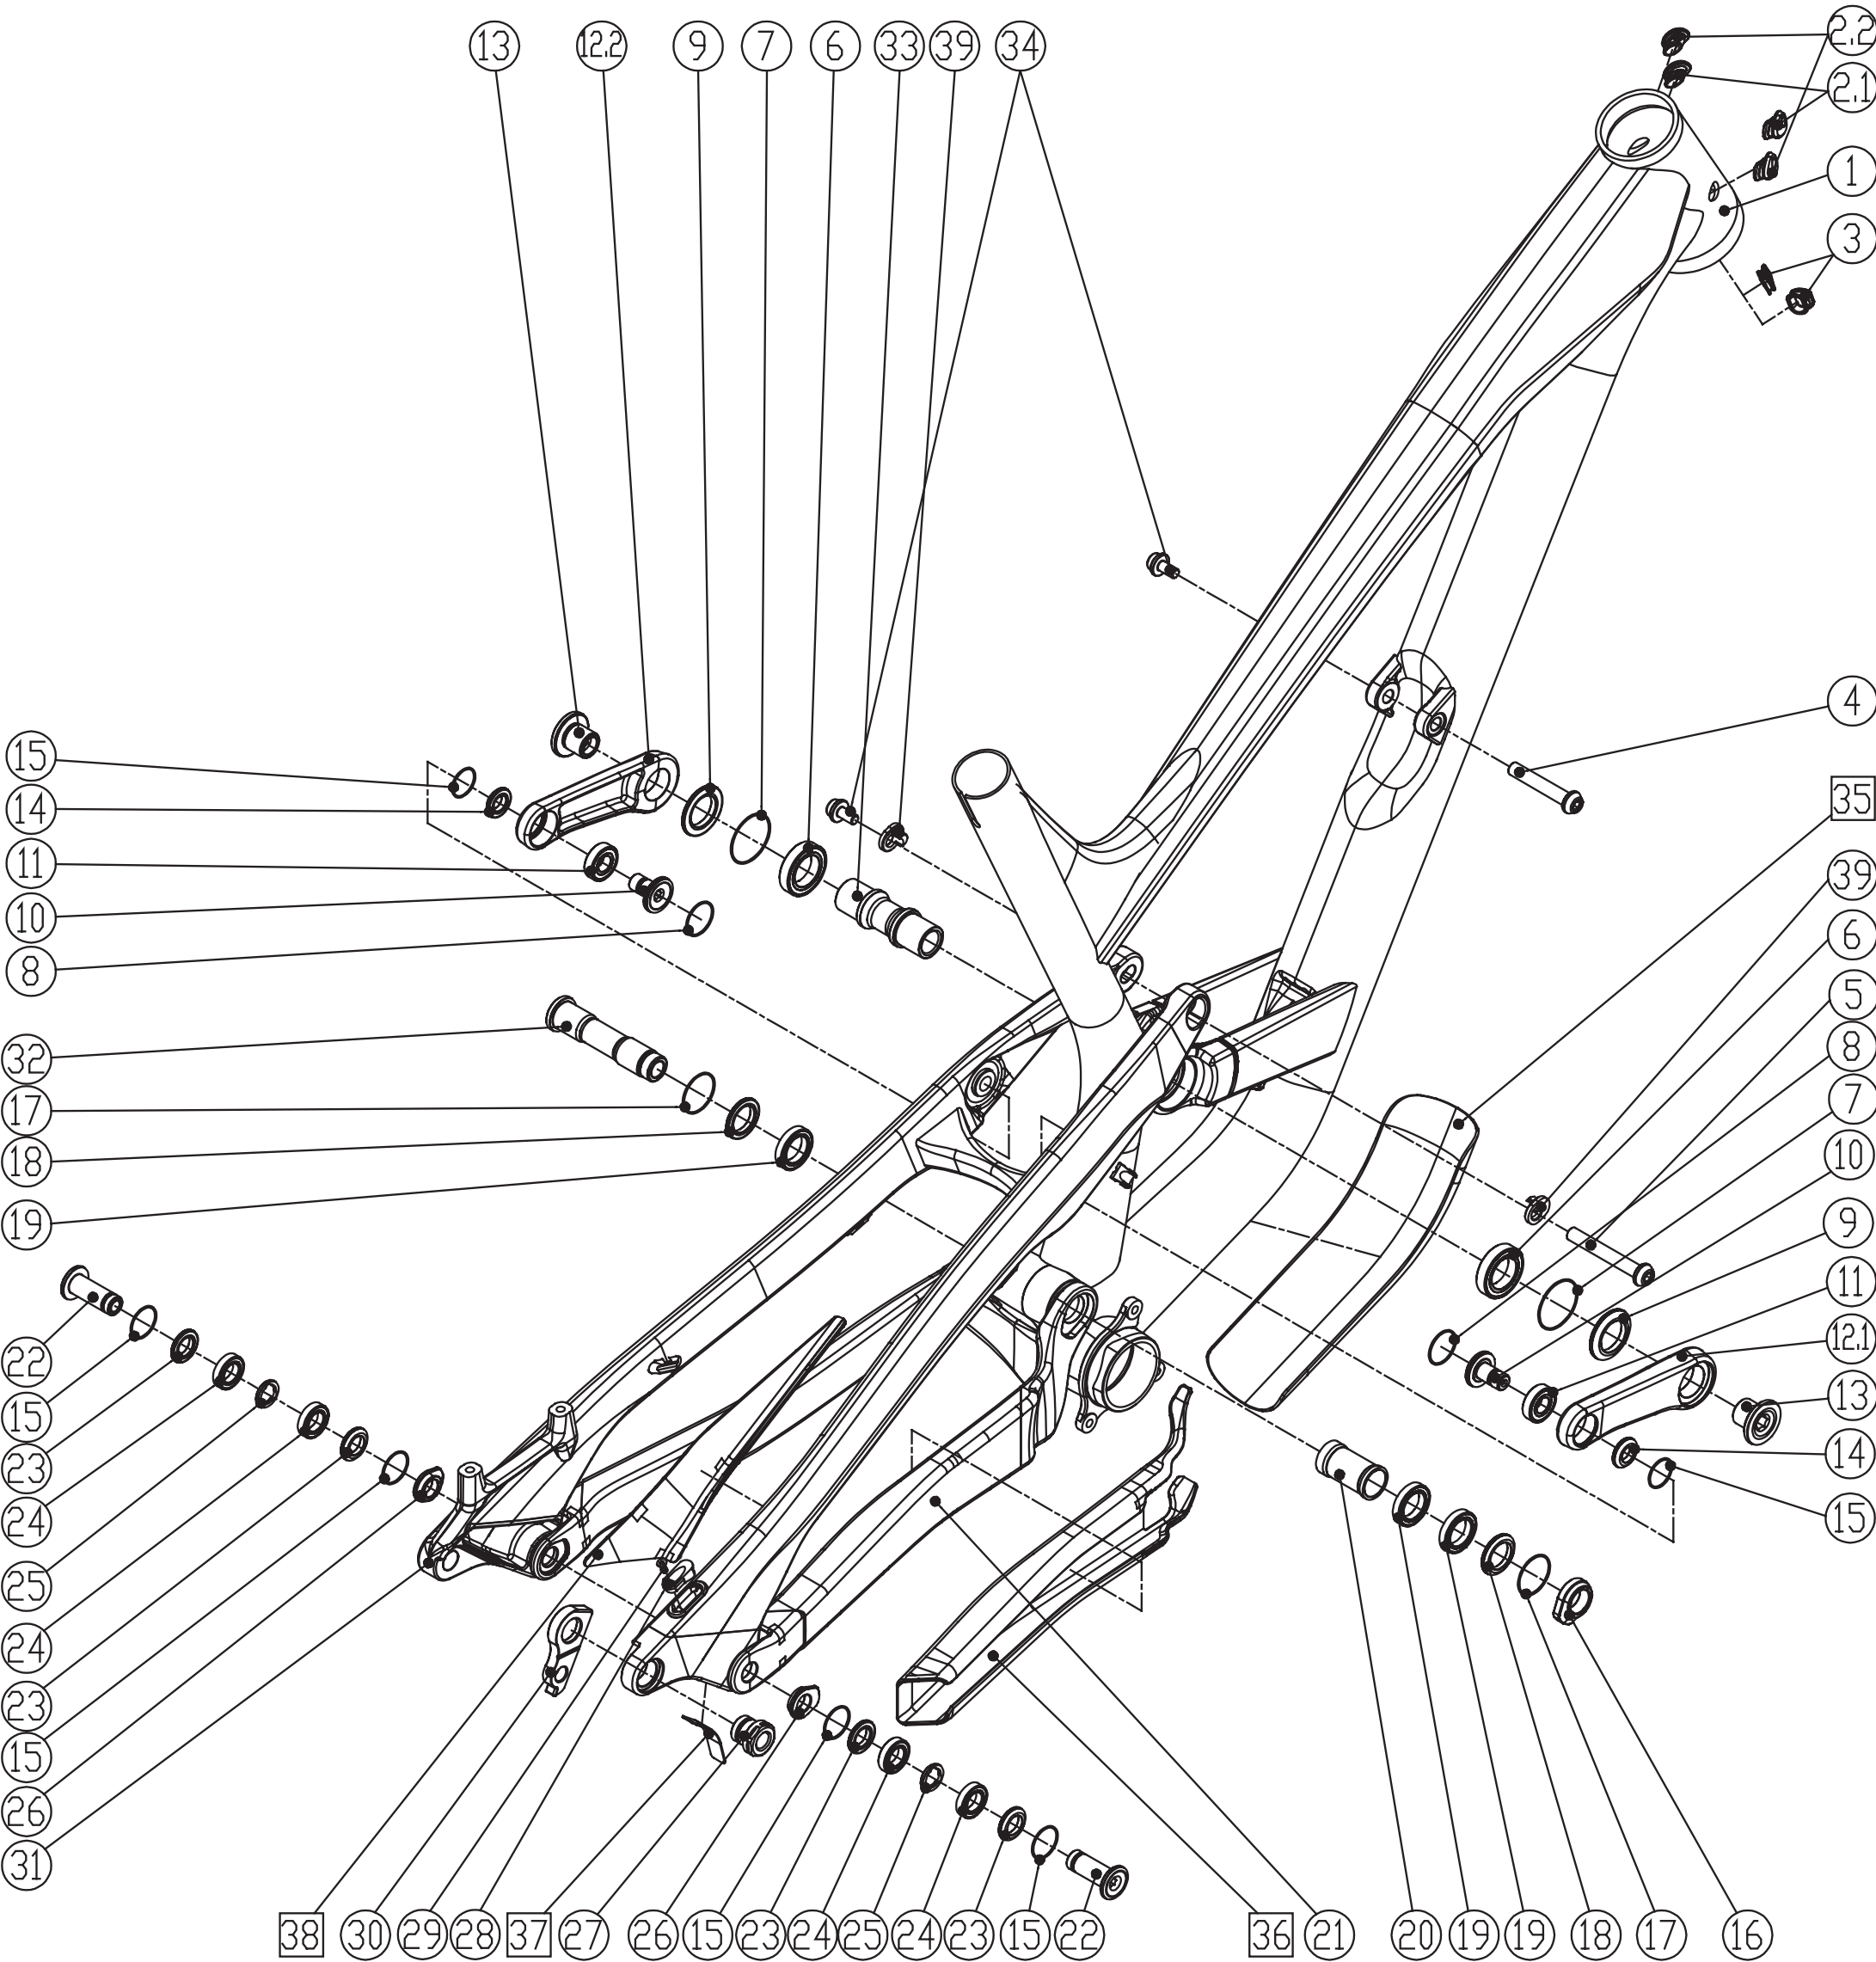


POS.	Part description	Quantity
1	Front Triangle	1
2,1	HT CABLE INTAKE 4MM	2
2,2	HT CABLE INTAKE 5.3MM	2
3	HT INNER CABLEGUIDE	2
4	SHOCK BOLT FRONT	1
5	SHOCK BOLT REAR	1
6	61804 2RSR BEARING	2
7	O-RING	2
8	O-RING	2
9	DISTANCEWASHER	2
10	UPPER LINK BOLT	2
11	61900 2Z BEARING	2
12,1	ROCKERARM-R	1
12,2	ROCKERARM-L	1
13	LOWER LINK BOLT	2
14	DISTANCEWASHER	2
15	O-RING	6
16	MAIN PIVOT NUT	1
17	O-RING	2
18	DISTANCEWASHER	2
19	61803 2RSR BEARING	3
20	DISTANCE_SLEEVE	1
21	CHAINSTAY	1
22	HORST LINK BOLT	2
23	DISTANCEWASHER	4
24	61801 2RSR BEARING	4
25	DISTANCE_SLEEVE	2
26	HORST LINK NUT	2
27	MECH HANGER SCREW	1
28	CABLEINTAKE_REVERB	1
29	M3x8 SCREW	1
30	MECH HANGER	1
31,1	SEATSTAY-M,L	1
31,2	SEATSTAY-XL,XXL	1
32	MAIN PIVOT AXLE	1
33	AXLE	1
34	SHOCK BOLT SCREW	2
35	DT PROTECTOR	1
36	CHAINSTAY PROTECTOR	1
37	RD PROTECTOR	1
38	SEATSTAY PROTECTOR	1
39	DISTANCEWASHER	2

CAPRA 29 AL

TORQUE // THREADLOCKER & GREASE INFORMATION

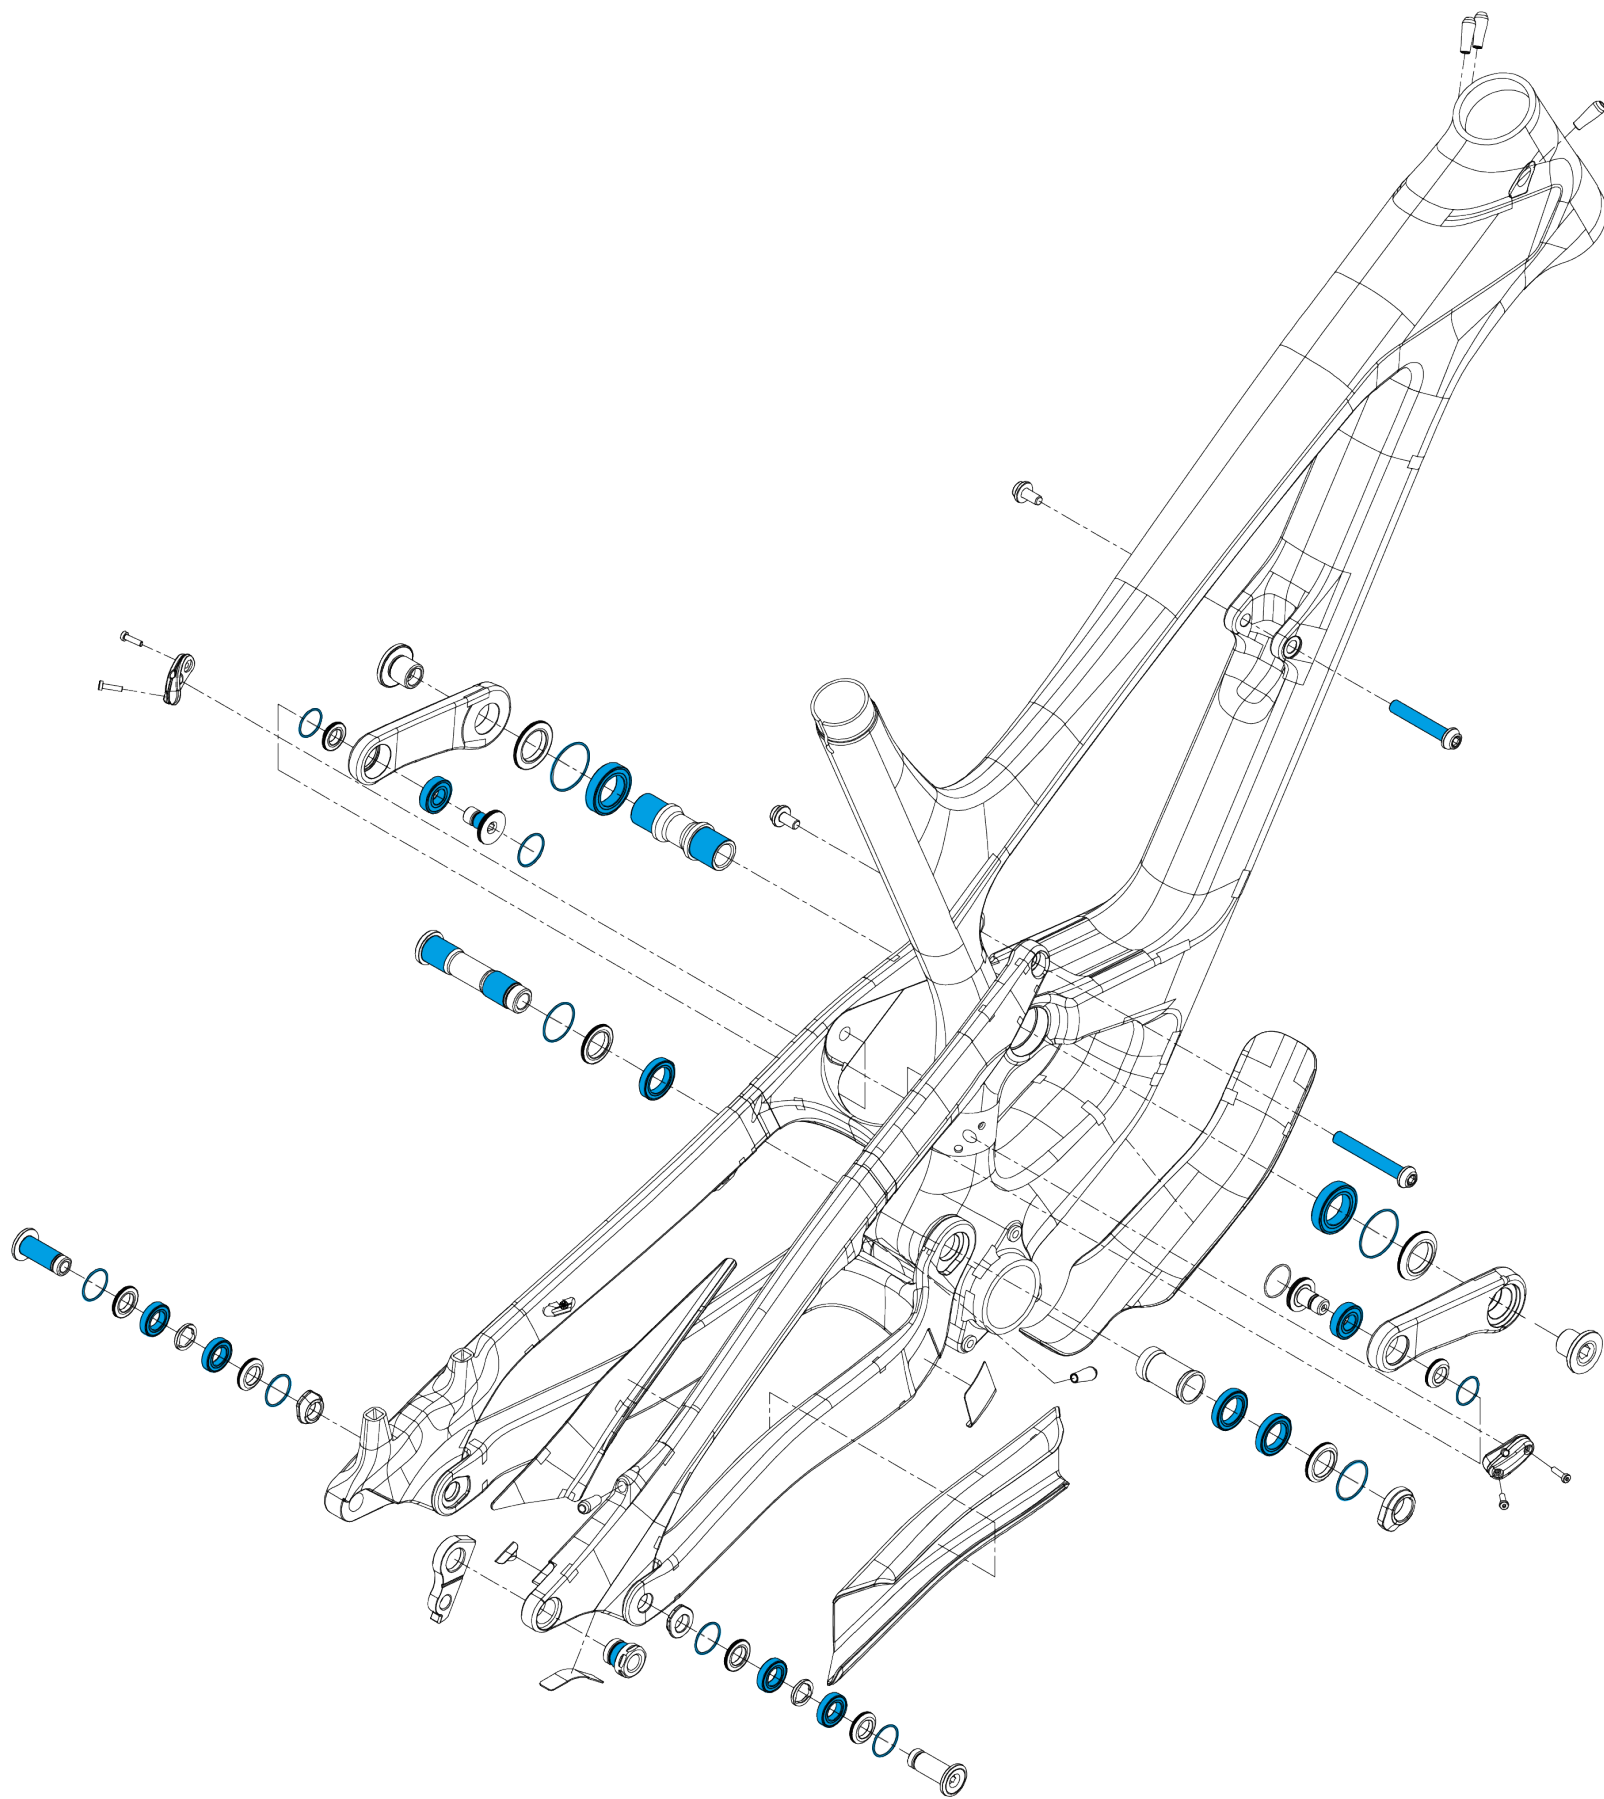

GREASE

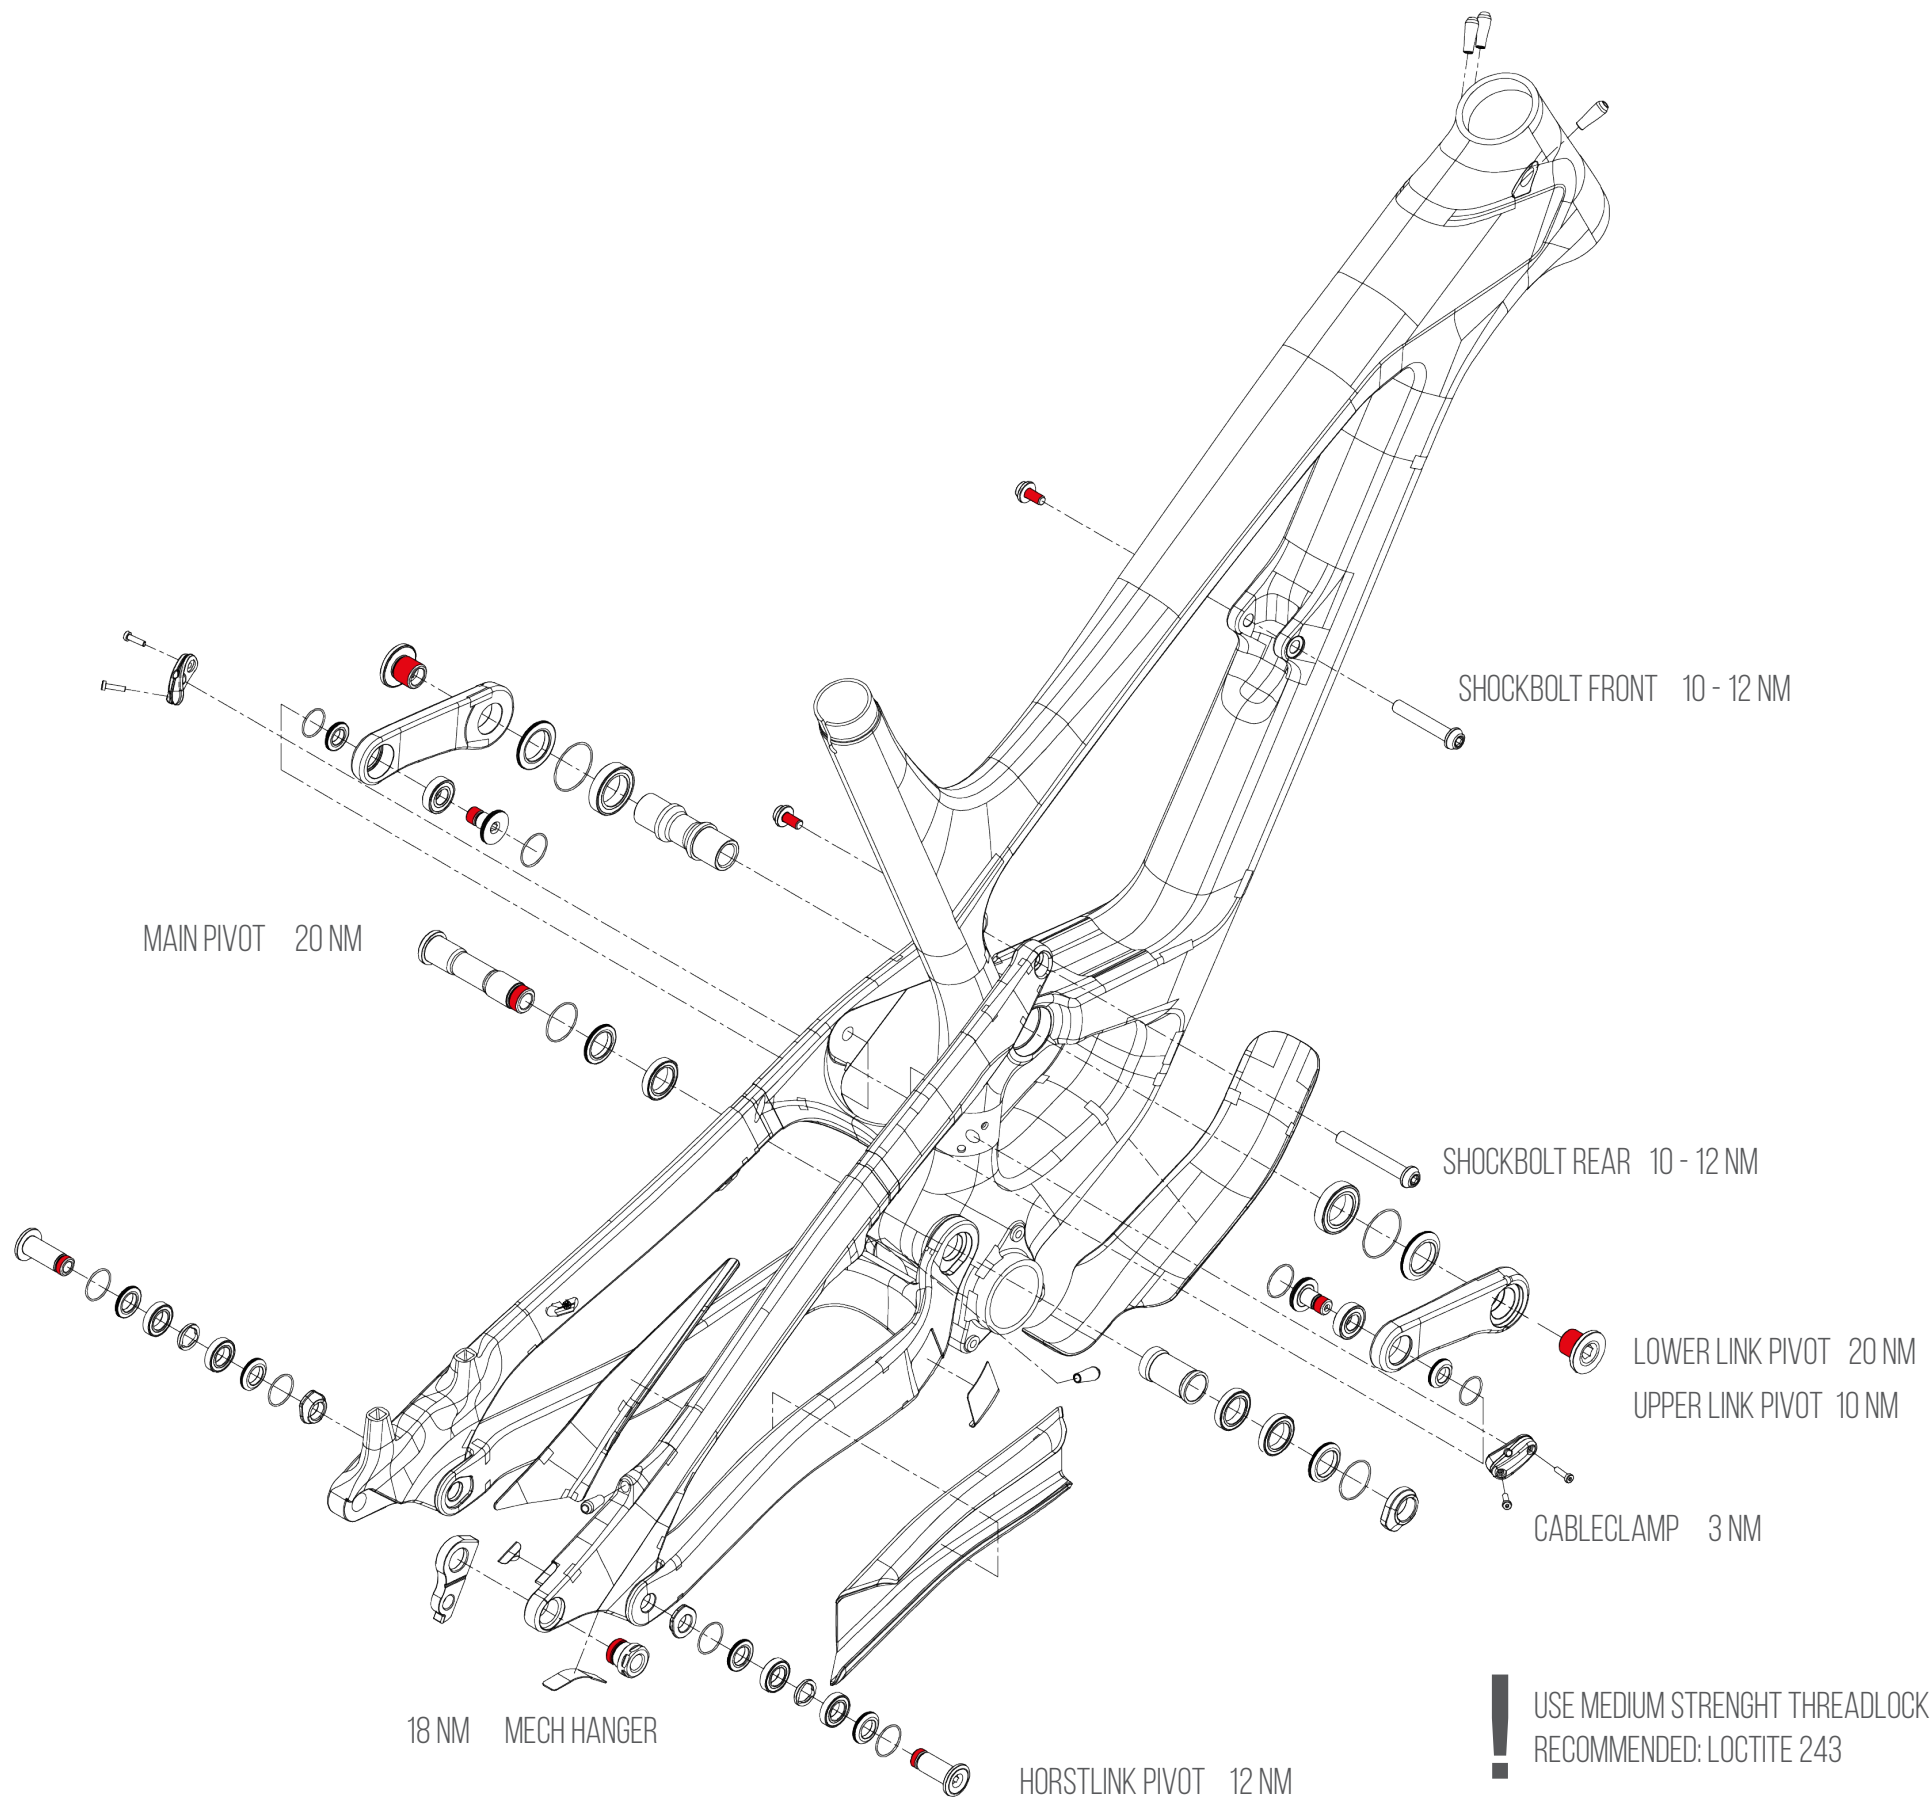

THREADLOCKER