

JEFFSY 27 + 29 AL



HEADSET DIMENSIONS

TOP: ZS 44 | 28,6 (1 1/8")
BOTTOM: ZS 56 | 40 (1.5")

SHOCK INSTALLATION LENGHT

29": 210 X 55 MM
27.5" 230 X 65 MM

SHOCK HARDWARE

FRONT: Ø8X20MM
REAR: Ø8X40MM

SEATPOST DIAMETER

31,6MM

SEATPOSTCLAMP INNER DIAMETER


34,9MM

BRAKEMOUNT STANDARD

POSTMOUNT 180


BOTTOM BRACKET STANDARD

PRESSFIT 92 BOTTOM BRACKET

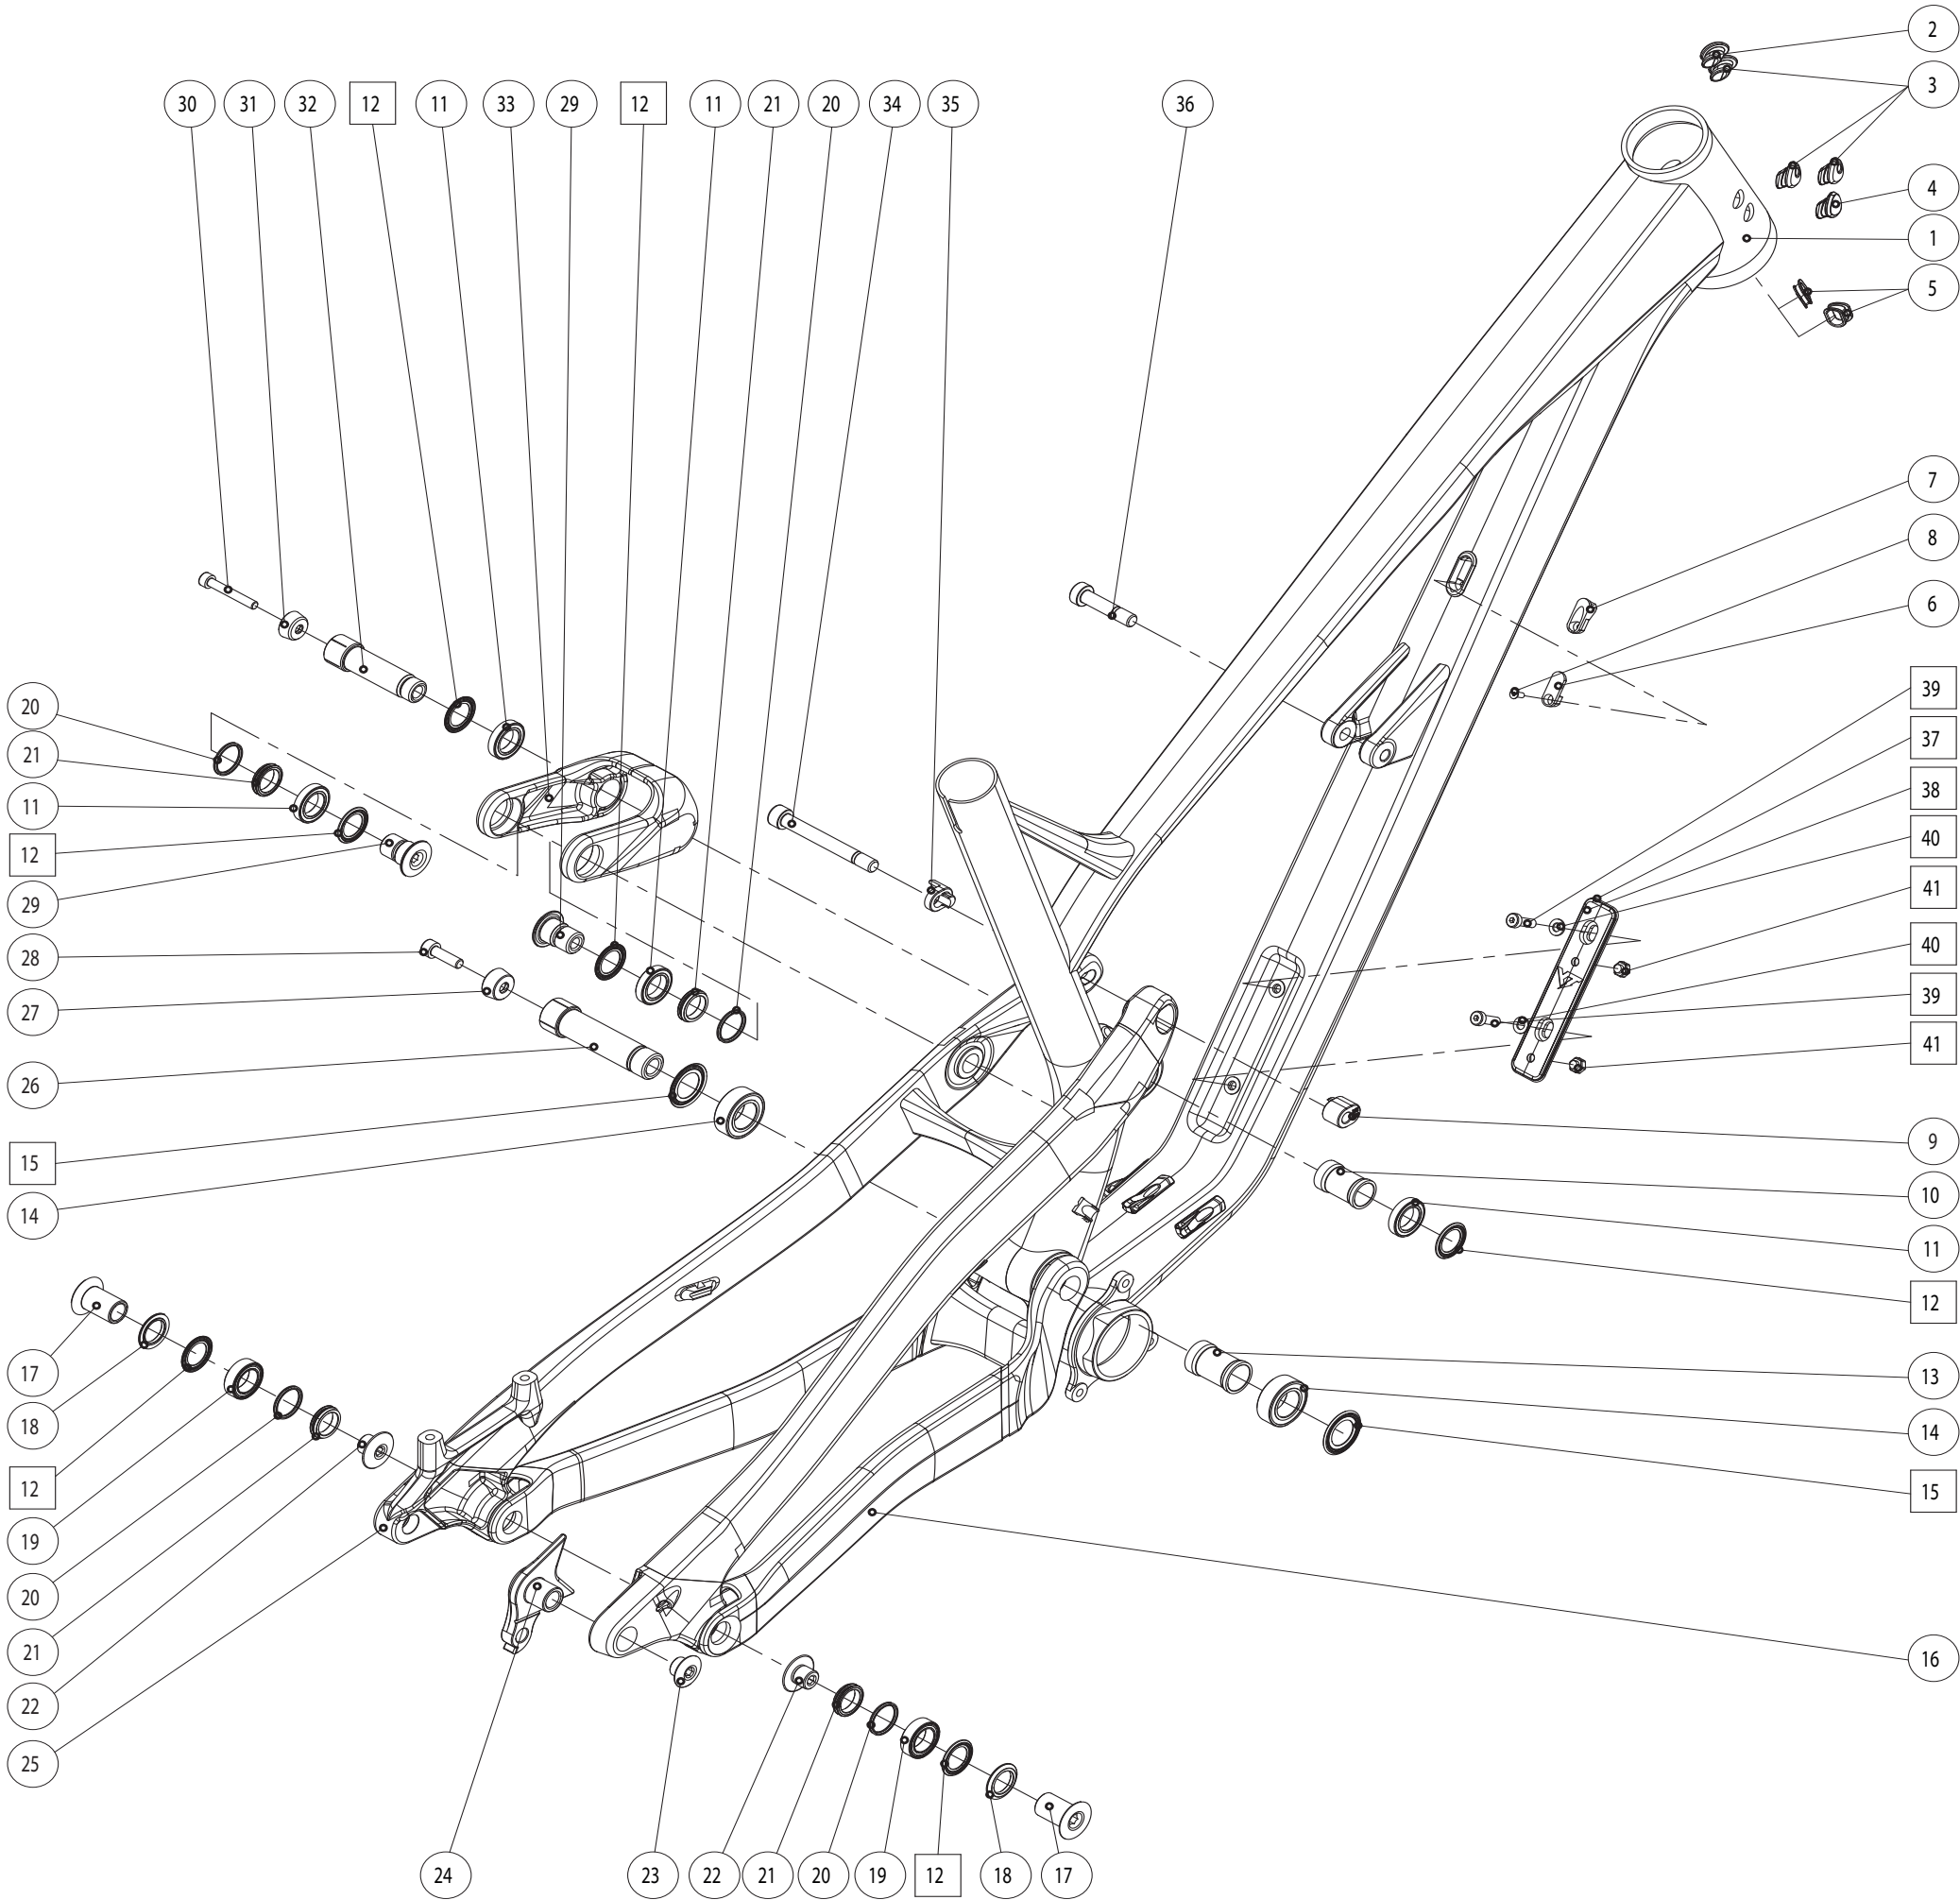

POS.	Part description	Quantity
1	FRONT TRIANGLE	1
2	HT CABLE INTAKE 5.3mm	1
3	HT CABLE INTAKE 4mm	3
4	HT CABLE INTAKE-no hole	1
5	HT INNER RUBBER CABLEGUIDE	2
6	COVER	1
7	CABLEINTAKE	1
8	SCREW M3 x8	1
9	FLIPCHIP DS	1
10	SLEEVE	1
11	BEARING 61802-2RS	4
12	WASHER	6
13	SLEEVE	1
14	BEARING 3903-2RS	2
15	WASHER	2
16	CHAINSTAY	1
17	HORSTLINK BOLT	2
18	WASHER	2
19	BEARING 63802-2RS	2
20	X RING	4
21	WASHER	4
22	HORSTLINK SCREW M12x1	2
23	SCREW M12x1,5	1
24	HANGER	1
25	SEATSTAY	1
26	MAIN PIVOT AXLE	1
27	TAPER WASHER	1
28	SCREW M6 x 20	1
29	UPPER LINK BOLT M14x1	2
30	SCREW M5x35	1
31	TAPER WASHER	1
32	LOWER LINK AXLE	1
33	LINK	1
34	REAR SHOCK BOLT	1
35	FLIPCHIP NDS	1
36	FRONT SHOCK BOLT	1
37	ORING	1
38	BOTTLEMOUNT COVER	1
39	SCREW DIN 7984 - M5 x 16	2
40	WASHER	2
41	BOTTLEMOUNT COVER PLUG	2
42,1	DT PROTECTOR-S/M	1
42,2	DT PROTECTOR-L/XL/XXL	1
43	SS PROTECTOR	1
44	CS PROTECTOR	1
45	SCREW M5x16	2
46	NUT	2
47	SCREW - M5 x 10	2


JEFFSY 27 + 29 AL

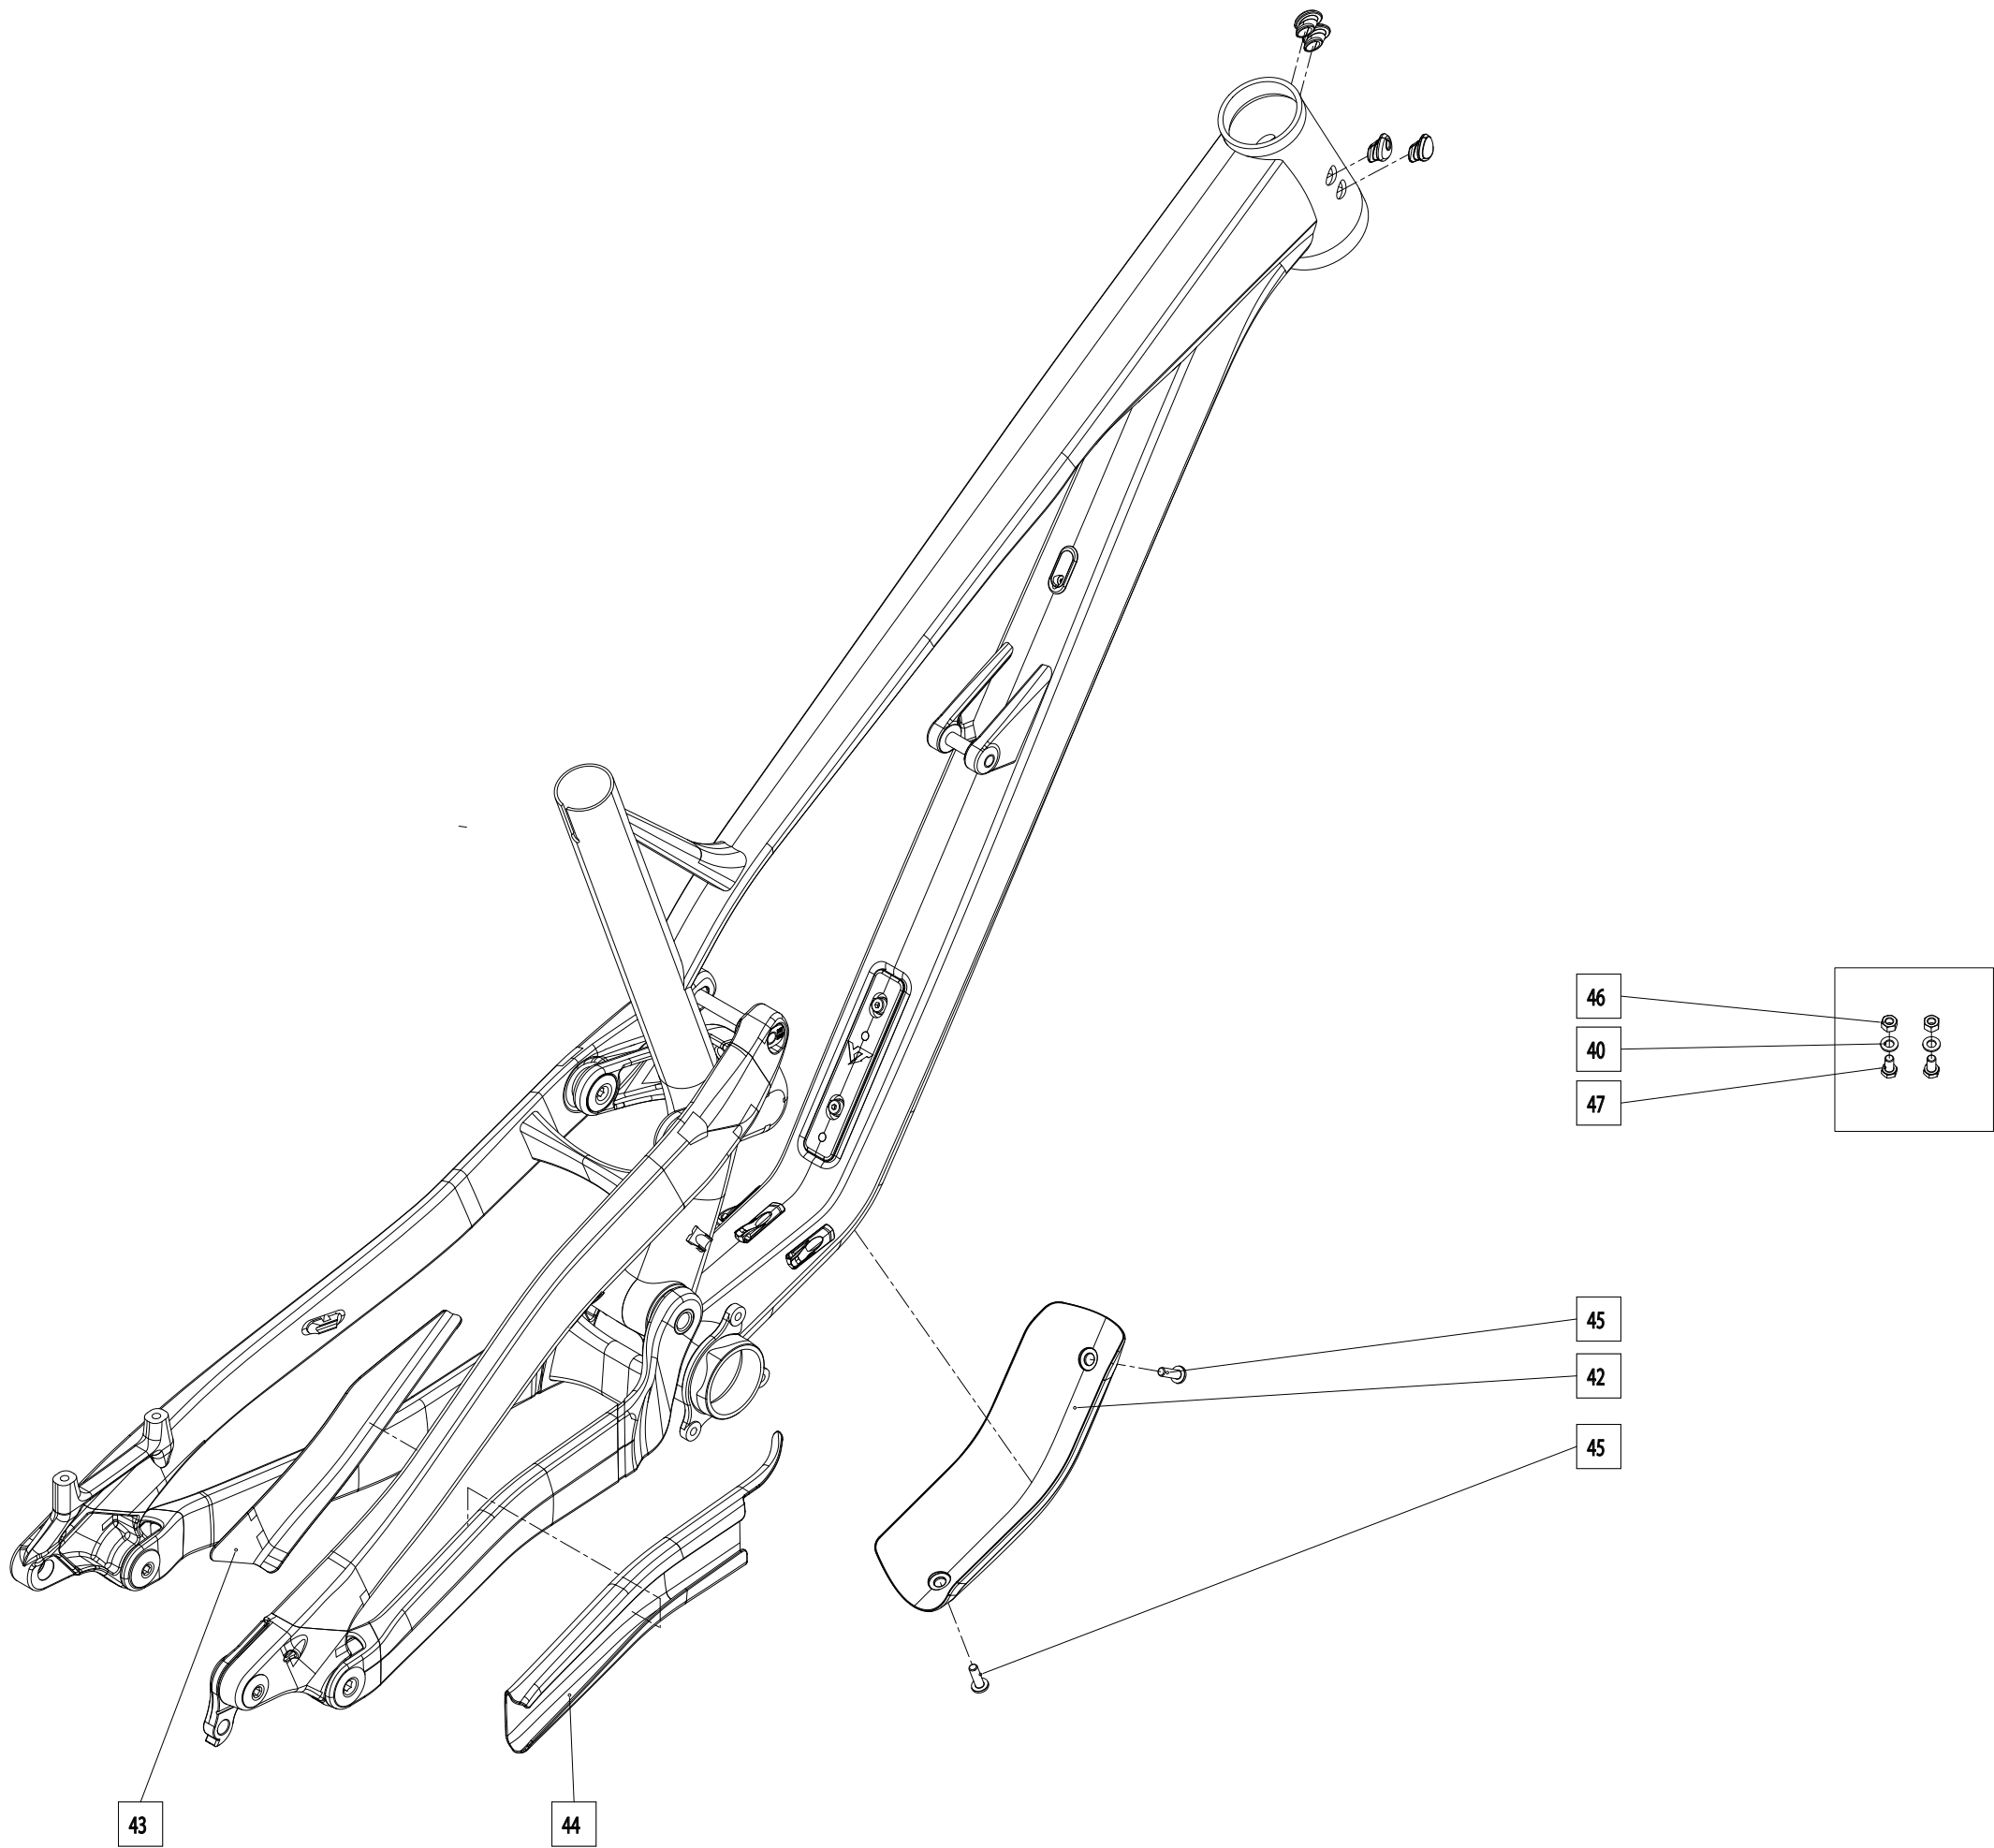


POS.	Part description	Quantity
1	FRONT TRIANGLE	1
2	HT CABLE INTAKE 5.3mm	1
3	HT CABLE INTAKE 4mm	3
4	HT CABLE INTAKE-no hole	1
5	HT INNER RUBBER CABLEGUIDE	2
6	COVER	1
7	CABLEINTAKE	1
8	SCREW M3 x8	1
9	FLIPCHIP DS	1
10	SLEEVE	1
11	BEARING 61802-2RS	4
12	WASHER	6
13	SLEEVE	1
14	BEARING 3903-2RS	2
15	WASHER	2
16	CHAINSTAY	1
17	HORSTLINK BOLT	2
18	WASHER	2
19	BEARING 63802-2RS	2
20	X RING	4
21	WASHER	4
22	HORSTLINK SCREW M12x1	2
23	SCREW M12x1,5	1
24	HANGER	1
25	SEATSTAY	1
26	MAIN PIVOT AXLE	1
27	TAPER WASHER	1
28	SCREW M6 x 20	1
29	UPPER LINK BOLT M14x1	2
30	SCREW M5x35	1
31	TAPER WASHER	1
32	LOWER LINK AXLE	1
33	LINK	1
34	REAR SHOCK BOLT	1
35	FLIPCHIP NDS	1
36	FRONT SHOCK BOLT	1
37	ORING	1
38	BOTTLEMOUNT COVER	1
39	SCREW DIN 7984 - M5 x 16	2
40	WASHER	2
41	BOTTLEMOUNT COVER PLUG	2
42,1	DT PROTECTOR-S/M	1
42,2	DT PROTECTOR-L/XL/XXL	1
43	SS PROTECTOR	1
44	CS PROTECTOR	1
45	SCREW M5x16	2
46	NUT	2
47	SCREW - M5 x 10	2

JEFFSY 27 + 29 AL

TORQUE // THREADLOCKER & GREASE INFORMATION

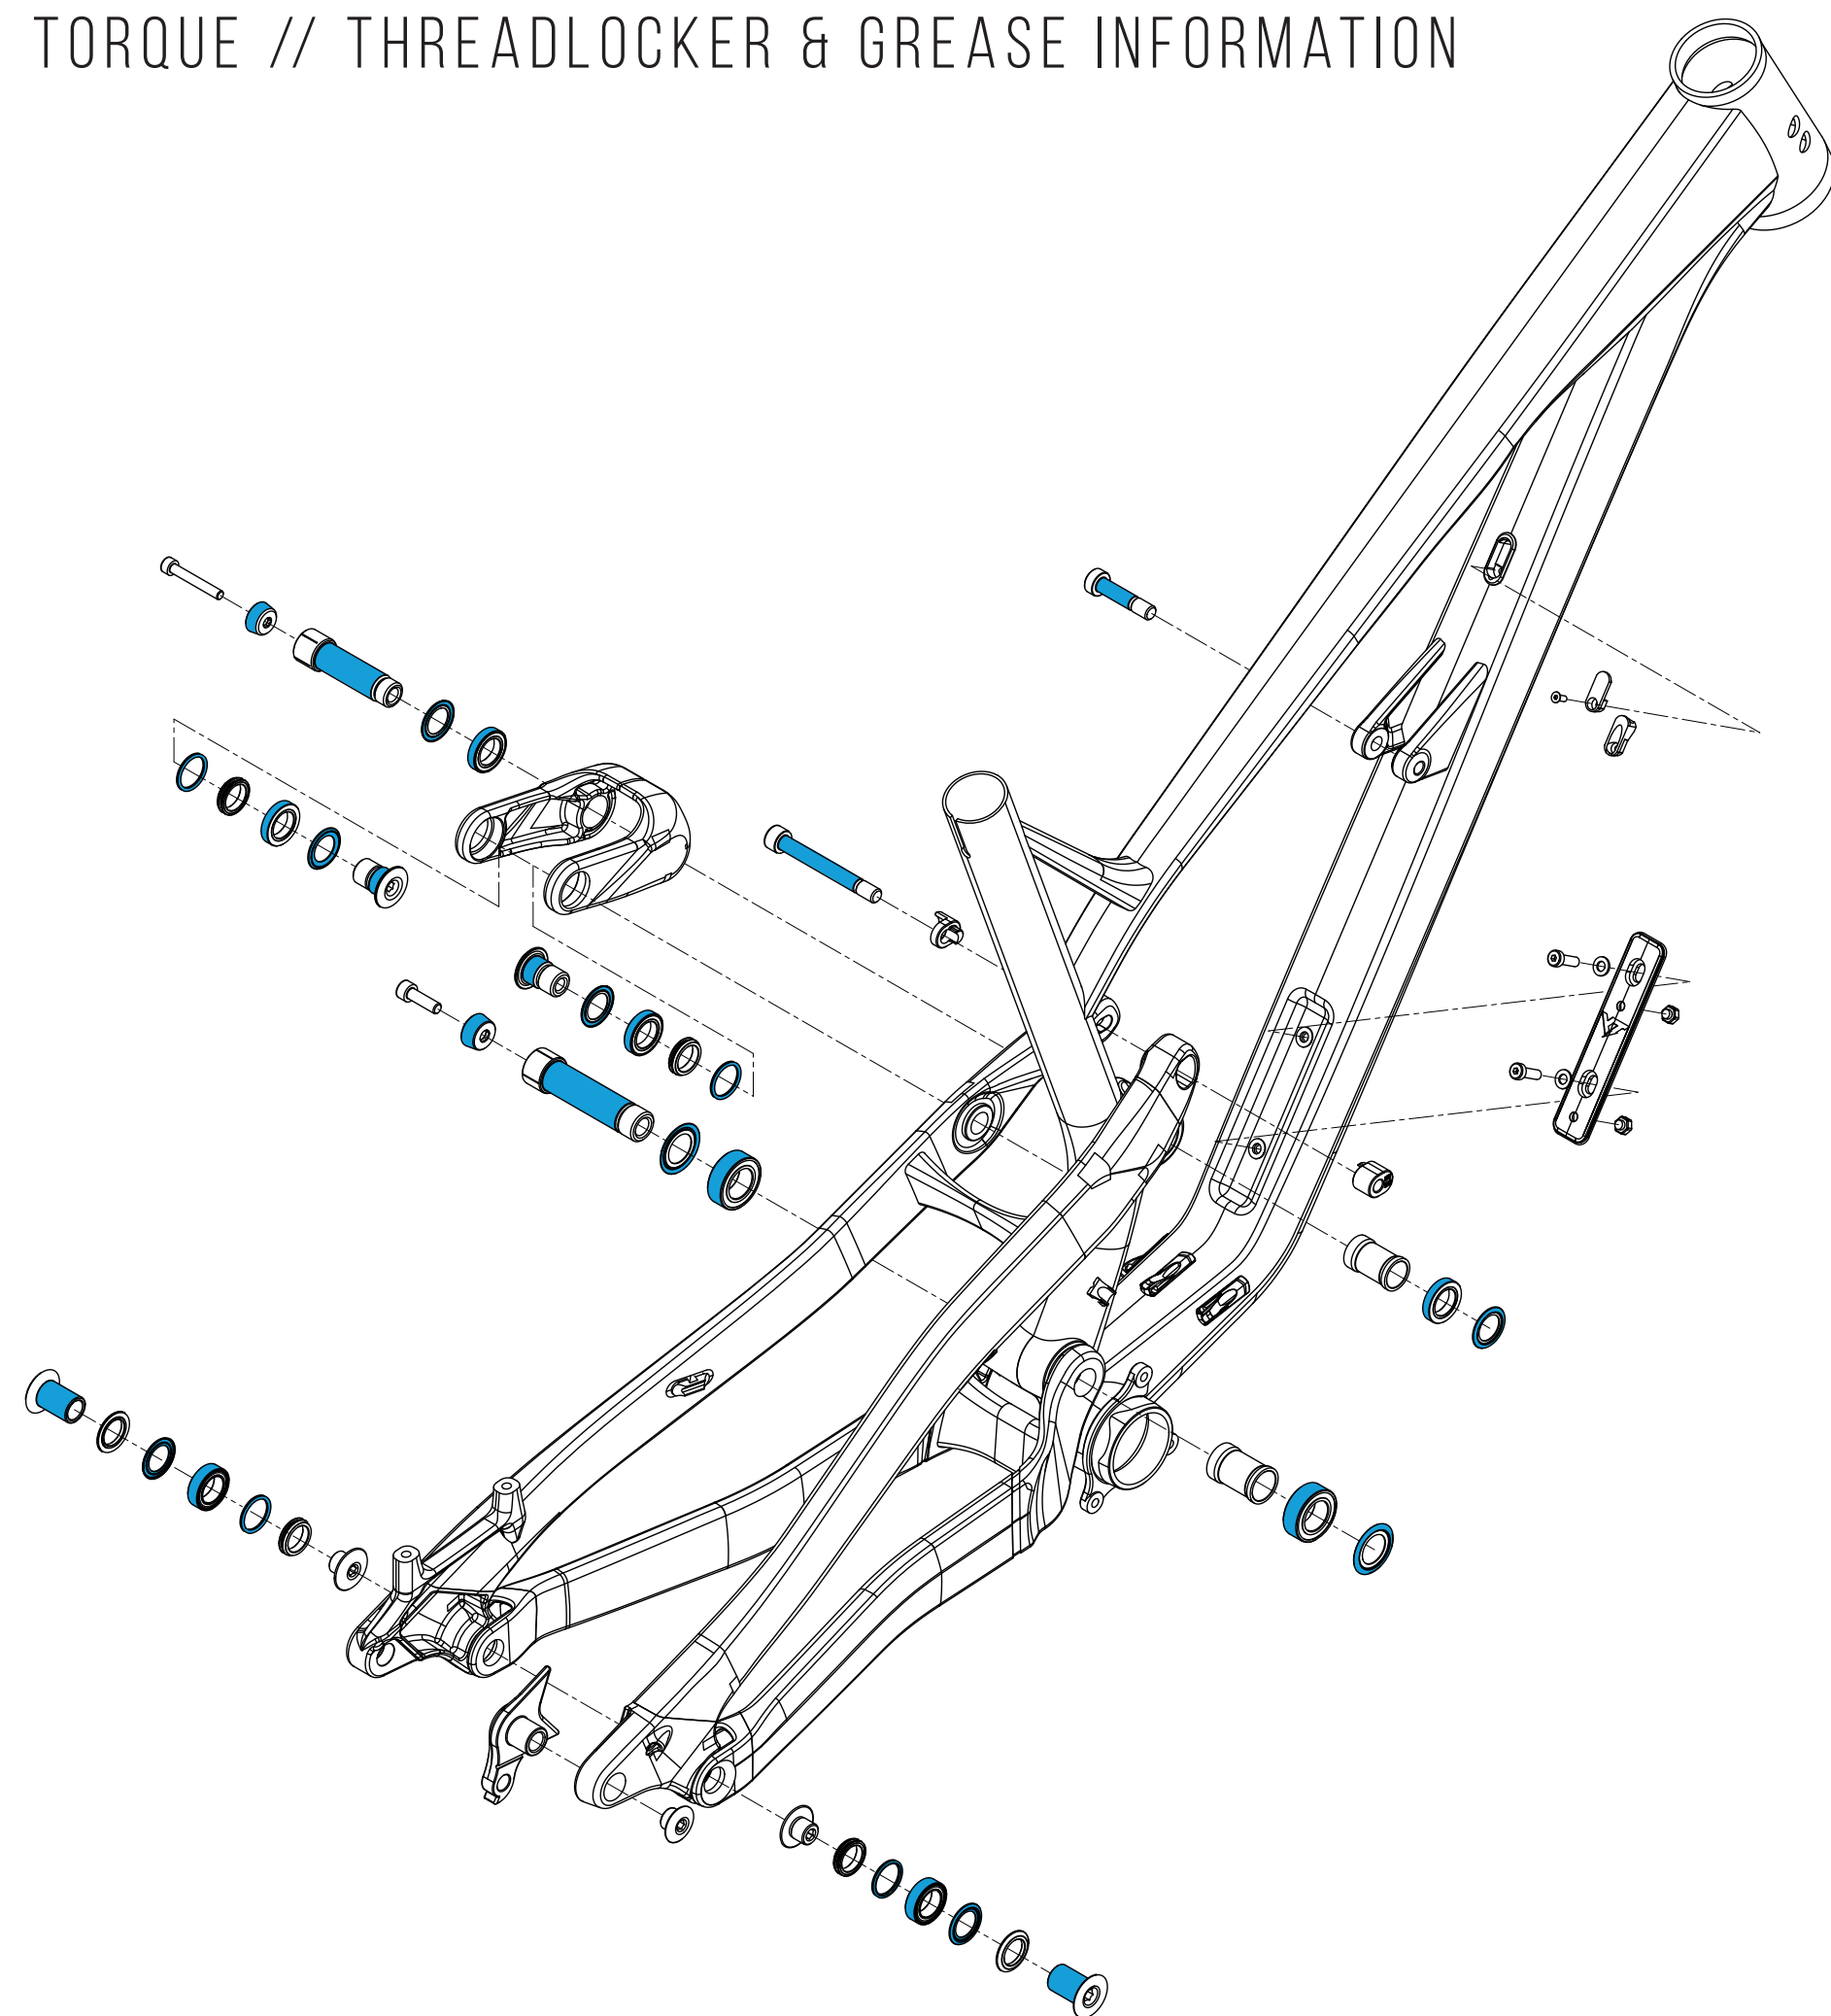

GREASE

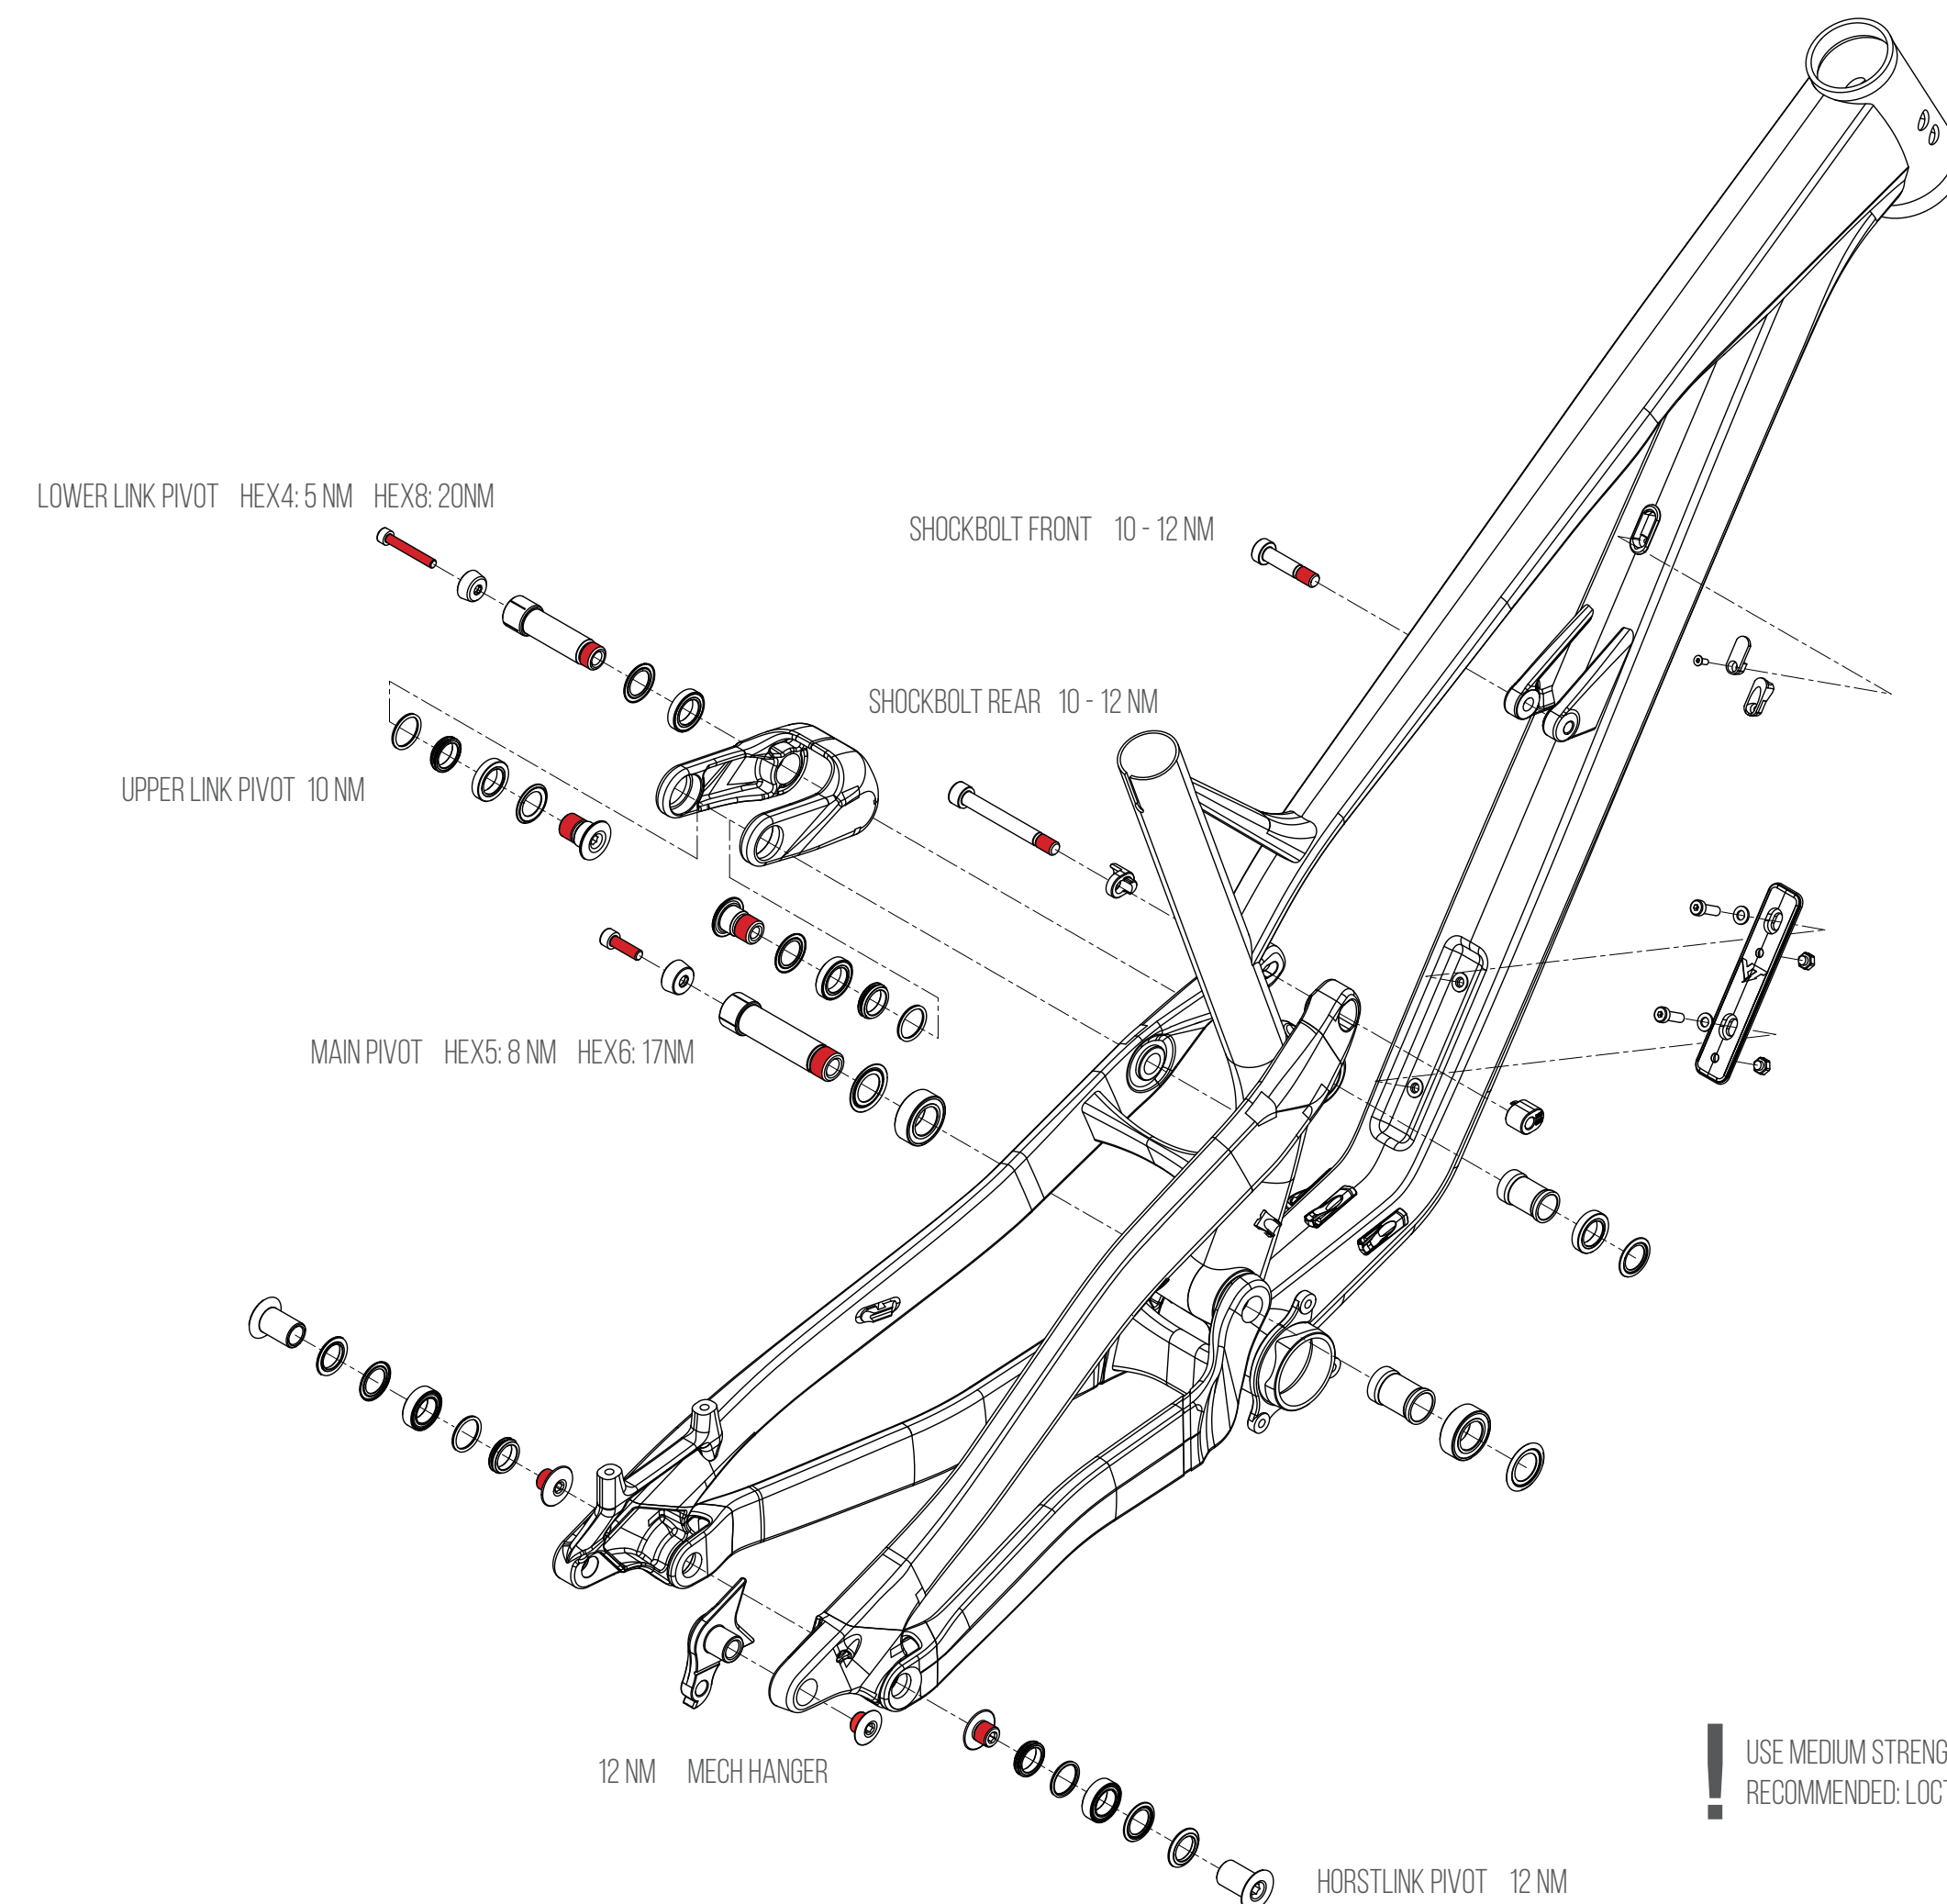

THREADLOCKER

USE MEDIUM STRENGTH THREADLOCKER
RECOMMENDED: LOCTITE 243